




1. USE PORTABLE VERTICAL PANELS AS CHANNELIZING DEVICES ONLY. DO NOT USE PORTABLE VERTICAL PANELS TO DELINEATE ROADSIDE CONSTRICTIONS OF THE CLEAR ZONE.
2. VERTICAL PANELS DESIGNATED "R" ARE PLACED TO THE RIGHT SIDE OF APPROACHING TRAFFIC. THOSE DESIGNATED "L" ARE PLACED TO THE LEFT SIDE.
3. USE RETRO-REFLECTIVE SHEETING AS PER THE CONTRACT.





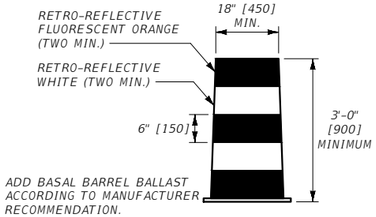

DRUMS HAVE CLOSED TOPS.

PLASTIC DRUM

GENERAL NOTES:

i. SEE THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD) PART 6 FOR ADDITIONAL INFORMATION.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS


REFERENCE STANDARD SPEC. SECTION 618	DWG. NO. 618-00


CHANNELIZING DEVICES AND OBJECT MARKERS


EFFECTIVE: JAN 23, 2020


MONTANA
Department of Transportation

--REVISED--
APR 28, 2022
JUN 27, 2024

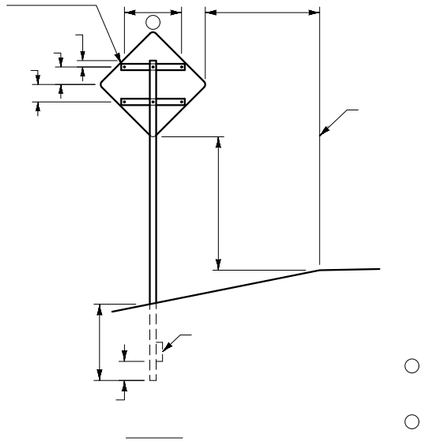

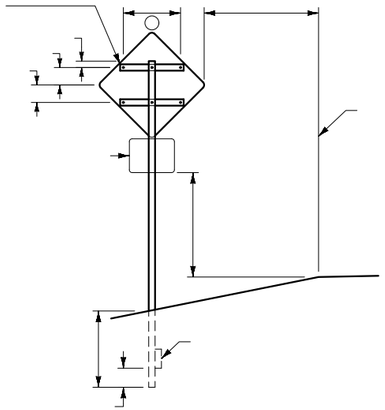


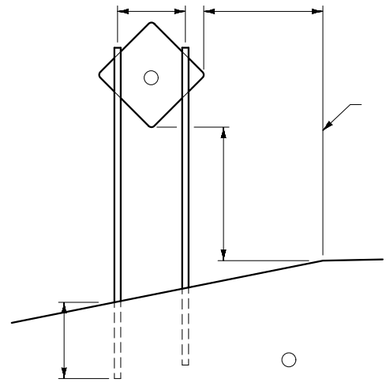


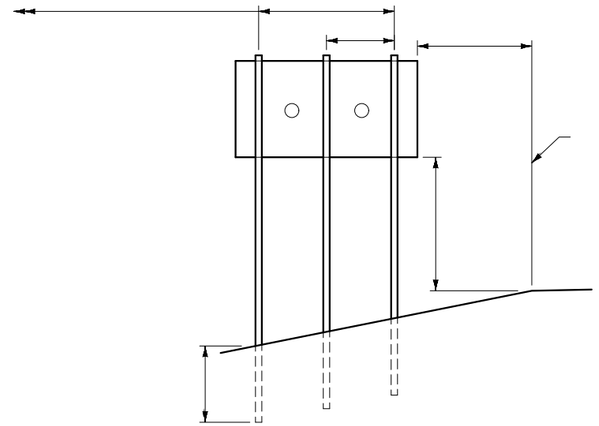



TYPICAL MULTIPLE POST INSTALLATIONS


(FOR CONSTRUCTION SIGNING ONLY)

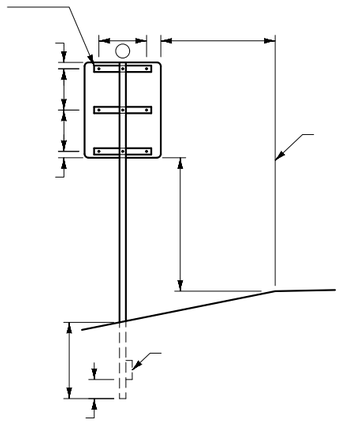




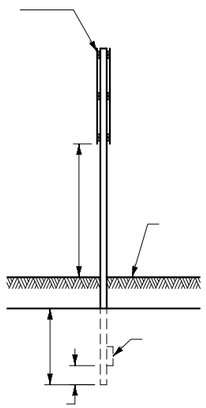



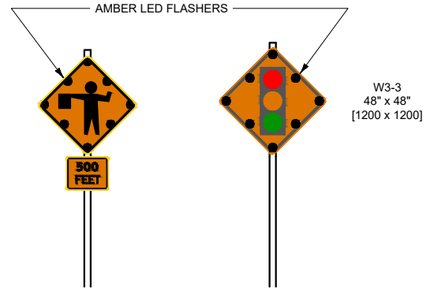

FLASHING FLAGGER AND SIGNAL AHEAD SIGN

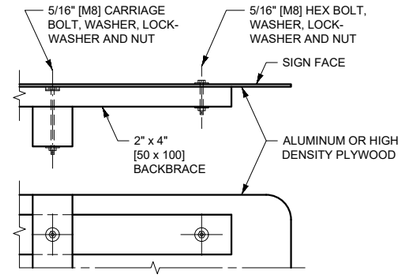

SIGN FASTENING DETAILS

- ◯ FURNISH POST INSTALLATIONS MEETING NCHRP 350 OR MASH CRASH TEST REQUIREMENTS.
- ◯ FURNISH POST OR POLE LENGTHS TO ACCOMMODATE FOUNDATION DEPTH, MOUNTING HEIGHT AND MOUNTINGS.
- ◯ BACKFILL FOUNDATION HOLES USING THOROUGHLY COMPACTED 8" LIFTS.
- ◯ IN HIGH WIND AREAS INSTALL LARGER POSTS OR POLES COMPLYING WITH THE FOUNDATION AND BREAKAWAY REQUIREMENTS OF DTL. DWG. NO. 619-20. THE MINIMUM POST SPACING FOR MULTIPLE POSTS LARGER THAN 4" [100] IS 7'-0" [2135].
- ◯ SIGN VERTICAL ALIGNMENT MUST BE WITHIN 5° OF PLUMB.
- ◯ USE THE URBAN MOUNTING HEIGHTS IN BUSINESS, COMMERCIAL, AND RESIDENTIAL DISTRICTS WHERE PARKING AND/OR PEDESTRIAN MOVEMENT IS LIKELY TO OCCUR, OR VIEW IS OBSTRUCTED. URBAN MOUNTING HEIGHTS MAY ALSO BE USED IN RURAL AREAS FOR INCREASED VISIBILITY.
- ◯ AMBER LED FLASHERS MUST MEET STANDARD SPECIFICATION SECTION 715 REQUIREMENTS.

UNITS SHOWN IN BRACKETS [ ] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS

REFERENCE	DWG. NO.
STANDARD SPEC. SECTION 618, 715	618-01


CONSTRUCTION SIGN DETAILS

EFFECTIVE: JAN 23, 2020

MONTANA
Department of Transportation

--REVISED--
JUN 27, 2024

5/14/2024 9:13 AM STDDRD618001.DWG

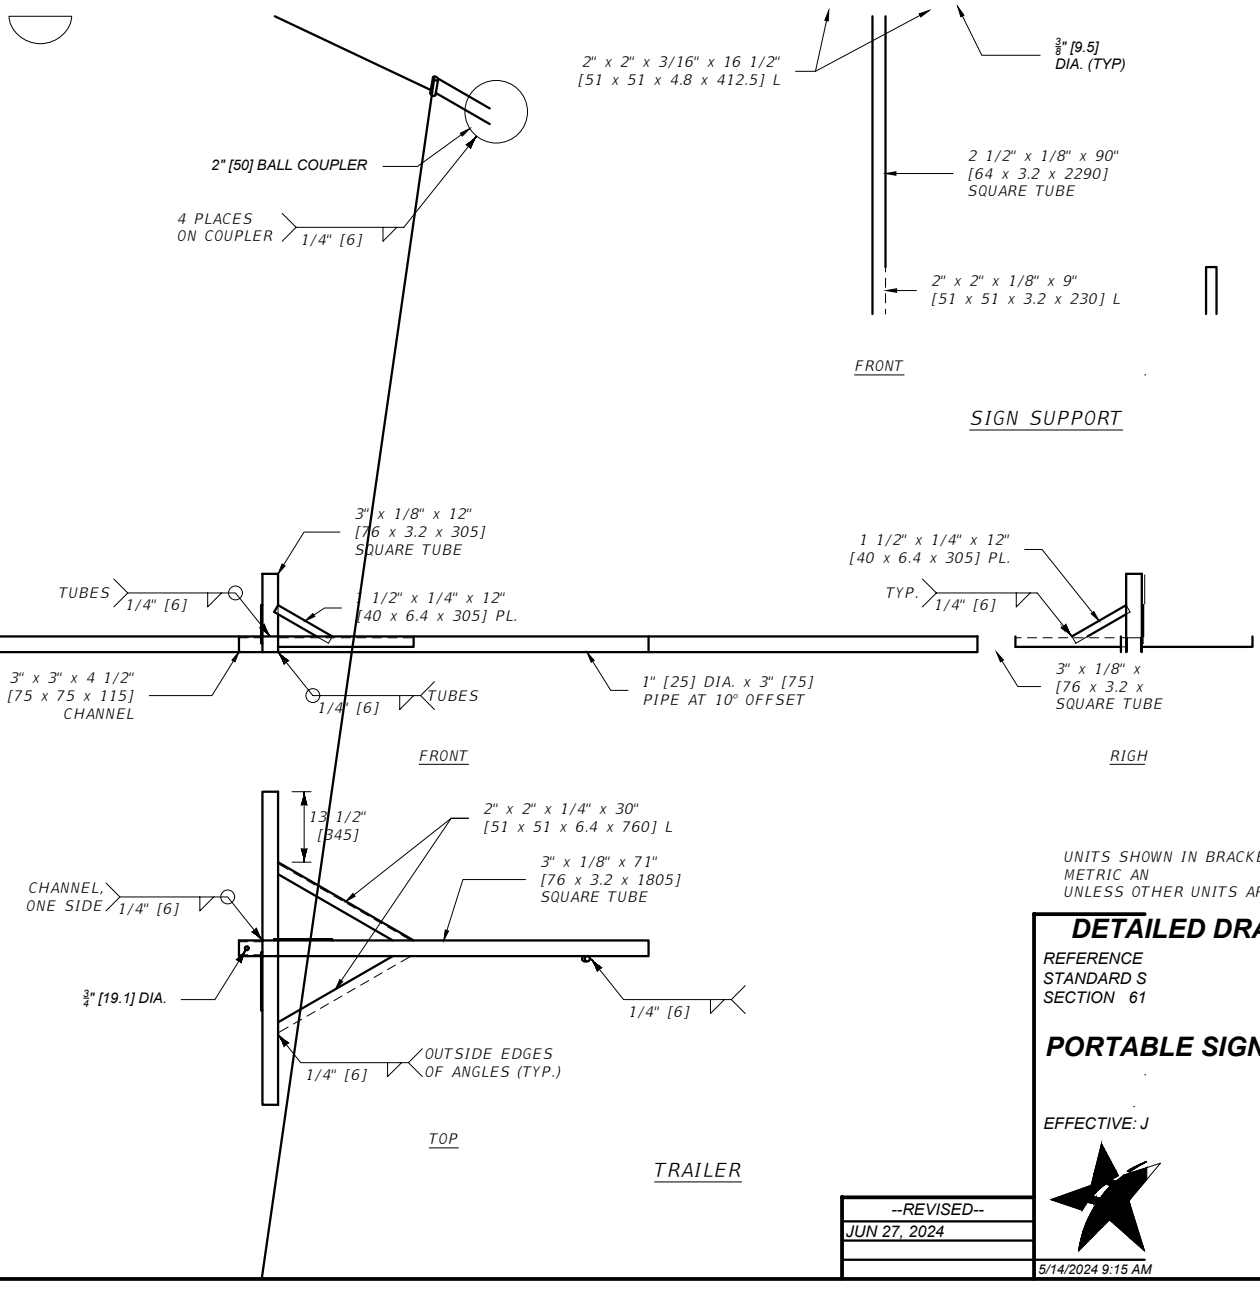

UNITS SHOWN IN BRACKETS [] ARE METRIC AN
UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS


REFERENCE
STANDARD S
SECTION 61

PORTABLE SIGN SUPPORT


EFFECTIVE: J

--REVISED--
JUN 27, 2024

5/14/2024 9:15 AM

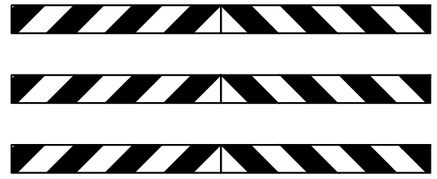

WHERE BOTH LEFT AND RIGHT TURNS ARE PERMITTED, POSITION BARRICADES WITH STRIPES SLOPING DOWNWARD LEFT AND RIGHT AWAY FROM BARRICADE CENTER.

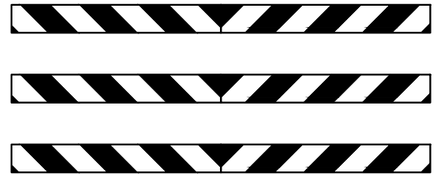

WHERE TURNING IS NOT PERMITTED, POSITION BARRICADES WITH STRIPES SLOPING DOWNWARD TOWARD BARRICADE CENTER.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

GENERAL NOTES:

1 SEE THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD) PART 6 FOR ADDITIONAL INFORMATION.

DETAILED DRAWINGS

REFERENCE STANDARD SPEC. SECTION 618

DWG. NO. 618-03

BARRICADES

EFFECTIVE: JAN 23, 2020

--REVISED--
JUN 27, 2024

MONTANA
Department of Transportation

5/14/2024 9:19 AM STDDRD618003.DWG