STATE OF MONTANA
DEPARTMENT OF TRANSPORTATION
BID PACKAGE

Sealed bids for construction of this project will be received by the Montana Department of Transportation, Construction Contracting Bureau, Room 101, 2701 Prospect, Helena, Montana until 9:00 a.m. on February 21, 2024. All bids will then be publicly opened, reviewed for correctness, and then publicly read.

Federal Aid Project(s):

NHPB STW-0(002) MT-200 Bridges - Lewistown EWP #1

Bid proposals, Plans, Standard Specifications, Detail Drawings, and Standard Contract Forms are on file for examination and may be obtained from the Construction Contracting Bureau of the Montana Department of Transportation, 2701 Prospect Avenue, P.O. Box 201001, Helena, Montana 59620-1001.

Prime bidders use the Electronic Bid System or bid on-line through Bid Express to produce a bid containing Proposal Forms, Schedule of Items, and Disadvantaged Business Enterprises (DBE) Requirements (if applicable).

CONTRACT #CM224
AWARDED ON: MARCH 5, 2024
TO: KIEWIT INFRASTRUCTURE CO

MONTANA DEPARTMENT OF TRANSPORTATION

Loran Frazier, Chairperson
Montana Transportation Commission

Malcolm “Mack” Long
Director of Transportation

Contract No.CM224
HB:BB:9884001AWD

MONTANA DEPARTMENT OF TRANSPORTATION
SCHEDULE OF ITEMS

CONTRACT ID: CM224

PROJECT: NHPB STW-0(002) 9884002001
MT-200 BRIDGES - LEWISTOWN EWP #1

SECTION: 0001 - BRIDGE REPLACEMENT EARLY WORK PACKAGE

PROP LINE NO.	ITEM NUMBER	ITEM DESCRIPTION	UNIT OF MEASURE	QUANTITY
0010	104030010	MISCELLANEOUS WORK	UNIT	10,000.00
0020	104030011	MISCELLANEOUS ITEMS-LS	LS	1.00
0030	104030045	MISCELLANEOUS ITEMS-EACH	EACH	4.00
0040	104030055	MISCELLANEOUS ITEMS-DAY	DAY	11.00
0050	105070000	CONTRACTOR SURVEY AND LAYOUT	LS	1.00
0060	108000000	CRITICAL PATH SCHEDULE	LS	1.00
0070	109200005	MOBILIZATION	LS	1.00
0080	201110005	CLEARING	ACRE	6.60
0090	202020041	REMOVE STRUCTURE	LS	1.00
0100	206000020	DETOUR-CONSTRUCT, MAINTAIN, REMOVE	LS	1.00
0110	208010150	TEMPORARY EROSION CONTROL-LS	LS	1.00
0120	208010200	TEMPORARY EROSION CONTROL-FIXED	UNIT	500.00
0130	301020268	TRAFFIC GRAVEL	CUYD	174.00
0140	553010152	PRESTRESSED BEAM-TYPE MTS-45	LNFT	425.00
0150	553010155	PRESTRESSED BEAM-TYPE MTS-54	LNFT	565.00
0160	559050115	FURN STEEL PILE-PIPE	LB	74,628.00
0170	559060200	PILE CUTTING SHOE	EACH	20.00
0180	606010385	REMOVE GUARDRAIL	LNFT	1,038.00
0190	606011518	TEMPORARY IMPACT ATTENUATOR	EACH	4.00
0200	618030005	TRAFFIC CONTROL DEVICES CB	UNIT	50,000.00
0210	618100000	SINGLE USE SIGNS	SQFT	84.00
0220	618100001	MOTORCYCLE ADVISORY SIGN	EACH	2.00
0230	618100005	PORTABLE VARIABLE MESSAGE SIGN	EACH	2.00
0240	618100007	TRAFFIC ACTUATED TEMPORARY SIGNALS	DAY	42.00
0250	618190100	TEMPORARY BARRIER RAIL	LNFT	440.00

TABLE OF CONTENTS
FEDERAL AID PROJECT(S) NHPB STW-0(002)

1. PROJECT DESCRIPTION [102] 5
2. CONTRACT TIME - COMPLETION DATE [108] (REVISED 1-21-16) 5
3. EXPEDITED NOTICE TO PROCEED [108] (REVISED 11-3-11) 6
4. TRAFFIC CONTROL & SEQUENCE OF OPERATIONS 6
5. COORDINATION WITH OTHERS 7
6. CONTRACT DEFINITIONS (101) (ADDED 1-11-24) 7
7. CONTRACT DOCUMENTS [102] 8
8. DISADVANTAGED BUSINESS ENTERPRISES (DBE) REQUIREMENTS [102] (REVISED 2-23-23) 8
9. DBE QUOTES [102] (REVISED 3-10-16) 8
10. DBE USAGE [102] (REVISED 11-16-23 M) 8
11. LABOR REQUIREMENTS [102] (REVISED 9-5-19) 9
12. CERTIFIED PAYROLL COMPLIANCE ELECTRONIC PAYROLL SUBMISSION [102] (REVISED 5-18-23) 9
13. BIDDER'S PROPOSED AGGREGATE SOURCE(S) [103] (REVISED 4-28-22) 9
14. SOIL BORING INFORMATION [102] 9
15. PARTNERING [105] (ADDED 1-11-24) 10
16. STEEL PRICE ADJUSTMENT [106] 10
17. BUILD AMERICA, BUY AMERICA (BABA) [106] (REVISED 1-11-24) 10
18. STATUS OF UTILITIES [108] (ADDED 1-1-03) 11
19. SUBCONTRACTING CONSULTANTS [108] (REVISED 2-27-14 M) 12
20. NOTICE TO BIDDERS [108] (ADDED 11-21-08) 12
21. ENVIRONMENTAL SPECIFICATIONS [208] (ADDED 9-9-21M) 12
22. CLEAN WATER ACT SECTION 404 PERMIT AND SECTION 401 CERTIFICATION 12
23. MOISTURE SENSITIVE SOILS [203] 13
24. STORM WATER PERMITTING REQUIREMENTS UNDER THE MT POLLUTANT DISCHARGE ELIMINATION SYSTEM (MPDES) [208] (REVISED 8-10-23) 13
25. MIGRATORY BIRD TREATY ACT COMPLIANCE - STRUCTURES 15
26. GREATER SAGE-GROUSE CONSERVATION 16
27. MISCELLAENOUS ITEMS-LS (BAT BOX) 16
28. BRIDGE DEMOLITION NOTIFICATION 17
29. SALVAGED MATERIAL 17
30. LEAD-BASED PAINT (LBP) REMOVAL AND DISPOSAL 19
31. ALTERNATE PRESTRESSED BEAM SECTIONS (REVISED 6-6-12) 20
32. PRESTRESSED BEAM 20

33. FURNISH STEEL PILE-PIPE 21
34. CLASS GENERAL CONCRETE [551] (ADDED 11-16-23) 21
35. IMPACT ATTENUATOR – TEMPORARY [606] (REVISED 1-21-21) 21
36. LONG TERM VARIABLE MESSAGE BOARDS [618] (ADDED 3-09-23 M) 22
37. WIDE LOAD ACCOMMODATIONS [618] (REVISED 11-18-21 M) 23
38. TRAFFIC ACTUATED TEMPORARY SIGNALS [618] (REVISED 8-10-23M) 24
39. TEMPORARY BARRIER RAIL [618] (REVISED 7-15-21) 24
40. MOTORCYCLE ADVISORY SIGNS [619] (REVISED 7-16-20) 25
41. SMART WORKZONE WALKBACK FLAGGER REPLACEMENT OPTION (END OF QUEUE DETECTION AND WARNING) [618] (ADDED 8-13-20) 26

SECTION II
Nondiscrimination Notice
Logs of Boring

SECTION III
Standard Provisions & Requirements

SPECIAL PROVISIONS

FEDERAL AID PROJECT NO(S). NHPB STW-0(002)

(REVISED 1-11-24)

The following special provisions are hereby made part of the contract and supplement and/or supersede any sections of the Standard Specifications of Road and Bridge Construction, adopted by the Montana Department of Transportation and the Montana Transportation Commission and all supplements thereto in conflict therewith.

The following documents are hereby incorporated by reference into this contract:

- "Question and Answer Forum": https://www.mdt.mt.gov/business/contracting/qacurrent.shtml
- "Standard Specifications for Road and Bridge construction": https://www.mdt.mt.gov/other/webdata/external/const/specifications/2020/SPEC-BOOK/2020-SPEC-BOOK-V5-0.pdf
- The most recent version of the Detailed Drawings: https://www.mdt.mt.gov/business/contracting/detailed_drawings.shtml
- The most recent version of the Materials Manual: https://www.mdt.mt.gov/other/webdata/external/materials/materials_manual/MDT-MATERIALS-MANUAL-011124-LETTING.pdf

The latest version of the Standard Specifications, Biannual updates, and revision summaries can be found at the following website: https://www.mdt.mt.gov/business/contracting/standard_specs.shtml

The Question-and-Answer Forum opens at 5:00 p.m. on the bid letting advertisement date and closes at 10:00 a.m. on the Monday before the bid letting. If Monday is a state holiday, the forum will close on Friday before the bid letting at 3:00 p.m. Answers provided by the Department to the questions, clarifications, and notifications can be posted up to 5:00 p.m. on the day before the letting.

The U.S. Department of Transportation (DOT) operates a toll-free number at 1-800-424-9071, 24 hours a day - 7 days a week. Anyone with knowledge of possible bid rigging, bidder collusion, or other fraudulent activities should use this number to report such activities. All information will be treated confidentially, and callers may remain anonymous.

The Department attempts to provide reasonable accommodations for any known disability that may interfere with a person participating in any service, program, or activity of the Department. Alternate accessible formats of this document will be provided upon request. If reasonable accommodation is needed to participate in Department bid lettings, call the Civil Rights Bureau at 444-6331 or TTY 406-444-7696 [TTY 1-800-335-7592 (toll free)].

1. PROJECT DESCRIPTION [102]

Procurement of long lead bridge items including beams and steel pipe pile; clearing of trees and shrubs; installation of environmental protection measures at sites 05991, 05993, 06005, and 06101; and detour construction and bridge removal at 06005 near Grass Range for the MT-200 Bridges-Lewistown Area project in Fergus County.

The project begins west of the Grass Range junction on MT-200 at site 05591 and proceeds east to 05993 and then east of Grass Range at Briggs Coulee (06005). The project proceeds south of Grass Range at Elk Creek (06101).

2. CONTRACT TIME - COMPLETION DATE [108] (REVISED 1-21-16)

This contract is a completion date contract. The work begins on the effective date stated in the Notice to Proceed (NTP) and all work is to be completed no later than November 15, 2024. Unusually severe weather is not considered as a delay cause. The NTP will be issued with an effective date of March 18, 2024.

3. EXPEDITED NOTICE TO PROCEED [108] (REVISED 11-3-11)

This project will have an expedited Notice to Proceed. The awarded Contractor is required to submit the completed performance and material bonds, and insurance certificates five calendar days after the project is awarded, with the day after the award counting as the first day. The Notice to Proceed will be issued with an effective date set approximately ten days after the award date.

4. TRAFFIC CONTROL & SEQUENCE OF OPERATIONS

A. Description. This special provision outlines the basic requirements of the contract related to the project traffic control and sequence of operations. However, this is not intended to cover every situation that may arise in the field as a result of Contractor operations or otherwise. In addition to the requirements of Subsection 104.05, Maintenance of the Work, and Subsection 108.04, Limitation of Operations, schedule operations in the sequences outlined below and in accordance with the plans provided in the contract plans package to provide the least amount of inconvenience possible to the traveling public.

B. Construction Requirements. Provide traffic control in accordance with Section 618, Supplemental Specifications, and these provisions. Submit a traffic control and sequencing plan for approval by the Project Manager 15 business days prior to construction. Include the following requirements within the plan.

1) Coordination. Participate in weekly coordination meetings with MDT, emergency services, and project stakeholders as determined by the Project Manager. Provide updates on work progress and upcoming work items. Provide accommodations for special events, movement of oversized loads, or for adjacent property owners as directed by the Project Manager.

2) Maintenance. Maintain the temporary detour in accordance with Section 206.03.4 and 104.05.

3) Traffic Control. Maintain 12-foot lanes in each direction for two-way traffic or 16-foot lane for one-way traffic during construction activities. Maintain 12-foot lanes in each direction for two-way traffic on weekdays between 6:00 pm and 7:00 am and on weekends. Single lane closures must be requested during construction for approval by the Project Manager.

4) Temporary Traffic Signals. Provide and install contractor furnished temporary traffic signals for alternating one-way traffic control in accordance with Department standards, these special provisions, and the Manual of Uniform Traffic Control Devices (MUTCD). The temporary signal layout, timing, and operation changes must be approved by the Project Manager. See Temporary Traffic Actuated Signals special provision for more information.

Submit the proposed layout, signal timing, and any operations changes to the Project Manager at least 10 business days prior to the start of alternating one-way traffic control. Remove the temporary traffic signals with the Project Manager’s approval.

5) Variable Message Signs. Provide Smart Workzone Walkback Flagger variable message signs (VMS) during alternating one-way temporary detour conditions (see special provision for more information). Remove Smart Workzone Walkback Flagger systems following completion of the full two-way temporary detour and replace with Long Term Variable Message Boards (see special provision for more information) until the contract completion date or as directed by the EPM.

6) Emergency Services. Provisions meeting the approval of local emergency services and the fire department must be made to adequately provide for the travel of emergency and fire vehicles through the entire project at all times.

7) Private Approaches. Maintain access to and from the premises of adjacent property owners at all times. Coordinate any private approach work a minimum of 48 hours in advance through the Project Manager and adjacent landowner.

8) Temporary Detour. Design detour and shoulder widening to meet standards for a 25 mile per hour design speed and WB-67 design vehicle. Provide a detour design including alignment, profile, surfacing, aggregate treatment (dust palliative), temporary barrier, retaining walls/shoring, ditches, drainage pipe, and other necessary items for inclusion in the detour design submittal. Supply the detour designs to the Project Manager at least 10 business days before commencing with the construction of the detour or widening. Apply aggregate treatment to temporary detour surfacing and provide traffic gravel as directed by the Project Manager to maintain the driving surface. Maintain minimum 15-foot horizontal separation between the edge of detour finished grade surfacing and existing power lines. Remove the temporary detour as directed by the Project Manager.

9) Shut-Down. Sequence the work so that traffic is routed on a finished grade surfacing with a minimum width of 12-feet in each direction during shutdown between project phases. Failure to provide surfacing and functional drainage will result in continuing assessment of contract time. Maintain the work in accordance with Subsection 104.05. Provide two-way traffic and access to all private approaches at all times during shutdown periods.

10) Other Provisions. Any of the above work sequences may be modified during construction if such modifications would be in the best interest of the traveling public and adjacent property owners.

C. Measurement and Payment. The temporary detour is paid for as Detour-Construct, Maintain, Remove per lump sum. Detour maintenance is paid for separately as Miscellaneous Items-Day per day. Temporary barrier rail is paid for in accordance with the Temporary Barrier Rail special provision. Temporary impact attenuators are paid for in accordance with the Impact Attenuator- Temporary special provision. Costs for traffic gravel are measured and paid for per Section 301 of the Standard Specifications. Aggregate treatment is incidental to the Detour-Construct, Maintain, Remove bid item. All work associated with this special provision is measured and paid for at the unit quantities and prices for the respective items of the contract. Where work is specified and not distinctly covered by a unit quantity and price, that work is considered incidental to the contract and no separate payment will be made.

5. COORDINATION WITH OTHERS

A. Description. Coordinate the MT-200 Bridges – Lewistown Area project with other contractors working on projects along MT-200 and US-87.

B. Construction Requirements. Coordinate with contractors on future construction projects SF 169 N57 SHLD WID & SLP FLAT (HSIP 57-3(65)94) UPN 9422000 and SF 179 N57 CURVE WIDENING (HSIP 57-3(67)106) UPN 9639000. These projects are slated for construction in 2024. Contract time will be suspended at the discretion of the Project Manager if the coordination of the work with these projects results in a delay to this project.

C. Method of Measurement and Basis of Payment. All the work entailed by this provision is considered incidental to and absorbed by the various bid items of the contract. No separate payment will be made.

6. CONTRACT DEFINITIONS (101) (ADDED 1-11-24)

The following definitions have been revised or added:

1) Addendum. A contract revision developed after advertisement and before opening proposals. Addenda includes the Question and Answer Forum and amendments.

2) Amendment. Contract revision to the electronic bid files including added bid items, deleted bid items, or bid item quantities.

3) Contract. The written agreement between the Department and the Contractor detailing the obligations of the parties for performing the prescribed work. The contract includes the proposal; signed contract award form; contract bond; Q&A forum; specifications; general and detail plans; Detailed Drawings; Notice to Proceed; Materials Manual; change orders; extra work orders; and authorized contract time extensions required to complete the project.

4) Question and Answer Forum (Q&A forum). Information which documents contract amendments and addenda posted during advertisement and prior to the opening of proposals. Q&A Forum information includes notifications, clarifications and the answers provided by the Department to questions posed by prospective bidders. Unanswered questions posed by prospective bidders are not considered modifications to the contract. Questions posed by prospective bidders are considered contextual information only.

7. CONTRACT DOCUMENTS [102]

The following documents are now available within the Contractors Reference Material on the Department's Contracting and Bidding webpage https://www.mdt.mt.gov/business/contracting/ :

1) Table of Contractor's Submittals.
2) Traffic Control Rate Schedule (Revised 3-9-23)
3) Erosion Control Rates

8. DISADVANTAGED BUSINESS ENTERPRISES (DBE) REQUIREMENTS [102] (REVISED 2-23-23)

The DBE goal for this contract is 0.00%. Use the AASHTOWare Project BidsTM Electronic Bid System (EBS) to print the DBE submittal and timing requirements. If the contract does not have a project-specific goal, the field will display in the AASHTOWare Project BidsTM bid file as a blank field.

List the DBE commitments in the EBS file. An on-line DBE Directory is available at: https://app.mdt.mt.gov/ess-dbe/.

If the DBE goal cannot be met, show a good faith effort per the Good Faith Effort Criteria and supporting forms, available at: http://www.mdt.mt.gov/publications/forms.shtml. Submit the Good Faith Effort documentation within 48 hours of the bid opening.

9. DBE QUOTES [102] (REVISED 3-10-16)

The Department has a quick and easy way for you to request quotes from Montana DBE-certified companies. The information goes to the DBE companies that same day. The on-line form is located at web site: https://app.mdt.mt.gov/dbeqt/.

Call the Department DBE Supportive Services, 1-800-883-5811, for further assistance. Using this online request form will be considered for good faith efforts, but it does not constitute meeting all requirements of good faith efforts.

10. DBE USAGE [102] (REVISED 11-16-23 M)

Contract specific goals are not placed on contracts; however, the Department has an overall 6.3% DBE goal it must achieve. To assist contractors in determining their DBE commitment level, the Department has reviewed the estimates for this contract, and has established an aspirational goal of 3.9% DBE usage. Although not a contract requirement, the Department believes that the aspirational goal can realistically be achieved through race neutral measures based on current availability of DBEs and standard competitive procurement processes. While the utilization is not mandatory to be awarded the project, continuing utilization of DBE firms on contracts supports the success of Montana's DBE Program.

Any project listing a 0% DBE aspirational goal does not mean that a DBE may not be used on that project. A 0% DBE aspirational goal may have been established due to any of the following reasons:

- Limited identified subcontracting opportunities;
- Minimal contract days; and/or,
- Small contract dollar amount.

Contractors are encouraged to identify any opportunities to subcontract to DBEs. The Department's DBE directory may be found at the following website: https://app.mdt.mt.gov/ess-dbe/.

11. LABOR REQUIREMENTS [102] (REVISED 9-5-19)

Pay the minimum wage rates contained elsewhere in the bid package. Comply with the required contract provisions contained in the form FHWA 1273 included with this contract. To obtain more information, contact the Department's Construction Engineering Services Bureau at 2701 Prospect, Helena, MT (406)475-2258, (800)335-7592 (TTY) or (406)444-7297 (Fax). The local employment service office, designated by the Workforce Service Division, Department of Labor & Industry, for this project is Lewistown.

Executive Orders 13658 and 13706 do not apply to this contract.

12. CERTIFIED PAYROLL COMPLIANCE ELECTRONIC PAYROLL SUBMISSION [102] (REVISED 5-18-23)

The Contractor and all subcontractors must use AASHTOWare Project Civil Rights & Labor™ (CRL) to submit Certified Payrolls (CPRs). Ensure that all subcontractors have submitted their Vendor Access Form which can be found on the following page: https://www.mdt.mt.gov/business/contracting/prevailing-wage.shtml to the Department and have received their login IDs prior to work.

Request the contract number and project ID(s) from the Project Manager. Provide the information to all subcontractors subject to the FHWA 1273 requirements. This information is also available using the Search Awarded Contracts located at: https://app.mdt.mt.gov/ess-awardedproj/.

Provide assistance and ensure all subcontractors submit CPRs electronically into CRL within the required timeframe.

13. BIDDER'S PROPOSED AGGREGATE SOURCE(S) [103] (REVISED 4-28-22)

No later than 7 calendar days after the date of bid-opening (the date of bid opening to count as the first full day), submit to ECCB form MDT-CON-106-02-3 in accordance with Subsection 103.11.

14. SOIL BORING INFORMATION [102]

The Department routinely conducts subsurface investigations and laboratory testing to collect soil, rock and groundwater information ("geotechnical information") within the anticipated limits of upcoming projects and maintains a comprehensive set of this information in its geotechnical file. For this contract, geotechnical information has been collected by the Department and logs of boring summarizing this information have been included in the Special Provisions and Plans. "Logs of Borings" in the Special Provisions and Plans are based on an interpretation of the field investigation and laboratory testing data, and do not include all the geotechnical information that may be available. The geotechnical information contained in the "Logs of Borings" has been edited or abridged and may not reveal all the geotechnical information which might be useful or of interest to the bidder.

The comprehensive set of geotechnical information is considered too voluminous to include in the bidding package. The geotechnical information that the Department has is available for review or copying upon request. Rock core samples are regularly retained as well. All bidders are expected to fully review all of the geotechnical information prior to submitting their bid. The prime bidder is responsible for ensuring that a firm submitting a subcontractor quote for the prime's use is aware of all available geotechnical information.

Submission of a bid without fully reviewing the Department's comprehensive set of geotechnical information or accepting a quote from a subcontractor without verifying that the subcontractor reviewed all available geotechnical information is a business decision by the

bidder. Failing to fully review all available geotechnical information waives the contractor from making any claim, whether termed "superior knowledge", "justifiable reliance", "differing site condition", or otherwise, against the Department for any information that may be included in the comprehensive geotechnical information file and not shown, or not fully shown, in the “Logs of Borings” contained in the contract documents.

Soil, rock, and groundwater conditions shown on the logs of boring apply only at the specific boring locations and at the time the borings were made. They are not warranted to be representative of subsurface conditions at other locations or times. Groundwater conditions commonly vary seasonally and from that encountered during drilling. Determination of a material's classification is based in part on judgment and opinion. The Department assumes no responsibility for any variation or misinterpretation of the classification of materials.

To review all available geotechnical information, submit a request in writing to the Department’s Geotechnical Section to schedule a time to review the available geotechnical information. Requests for access should be made a minimum of 10 business days prior to the bid opening.

15. PARTNERING [105] (ADDED 1-11-24)

In accordance with Subsection 105.05.1, this contract requires Level (II) facilitation.

16. STEEL PRICE ADJUSTMENT [106]

In accordance with Subsection 106.09.1, the base price per pound of steel for this contract is: $0.95.

17. BUILD AMERICA, BUY AMERICA (BABA) [106] (REVISED 1-11-24)

Furnish construction materials manufactured in the United States. Construction materials include articles, materials, or supplies that are or consist primarily of:

- Non-ferrous metals.
- Plastic and polymer-based products (including polyvinylchloride, composite building materials, and polymers used in fiber optic cables).
- Glass (including optic glass).
- Fiber optic cable (including drop cable).
- Optical fiber.
- Lumber.
- Drywall, and
- Engineered wood.

Construction materials exclude cement and cementitious materials, aggregates including stone, sand, or gravel, or aggregate binding agents (e.g., asphalt binder) or additives (e.g., polymer modifiers and admixtures).

Manufacturing processes for the construction material must occur in the United States. Manufacturing processes for each of the bulleted construction materials above are defined in 2 CFR 184.6 and are summarized below.

a) Non-ferrous metals: Initial smelting or melting through final shaping, coating, and assembly.

b) Plastics: Initial combination of plastic, polymer based, or composite materials until item is in its final form.

c) Glass: Initial batching and melting, annealing, cooling, and cutting.

d) Fiber Optic Cable: Initial ribboning, buffering, and fiber stranding and jacketing.

e) Optical Fiber: Initial preform fabrication through completion of draw.

f) Lumber: Initial debarking, treatment, and planing.

g) Drywall: Initial blending of gypsum, cutting, and drying of sandwiched panels.

h) Engineered Wood: Initial combination of constituents until item is in its final form.

BABA preference applies to articles, materials, and supplies that are consumed in, incorporated into, or affixed to a project. It does not apply to tools, equipment, and supplies brought to the construction site and removed at or before the completion of the project (e.g., temporary aluminum scaffolding). Buy America preference does not apply to equipment and furnishings that are used at or within the finished infrastructure project but are not permanently affixed to the structure (e.g., movable chairs, desks, or computer equipment used at or within the project but are not integral or permanently affixed to a structure).

2 CFR 184 applies to all construction materials on projects receiving federal financial assistance funds. Submit Form MDT-MAT-407 “Manufacturer’s Certificate of Compliance” for every material identified as a construction material in the Department’s Materials Manual Section MT 601 furnished to the project. For all other materials, documentation will be required upon request. Do not incorporate construction materials into the project until all required documentation is submitted to the Department. Ensure that suppliers and manufacturers understand the BABA and contract requirements to supply the required documentation.

The Department will not accept items installed until all supporting documentation has been reviewed and is found to be in accordance with the contract requirements. Insufficient or unavailable documentation or documentation showing products containing construction materials of foreign origin are grounds for removal and replacement at the contractor’s expense.

The Department has designated contract materials as “construction materials” by their respective 9-digit material codes in section MT 601 of the Montana Materials Manual. However, the Department recognizes there will be situations where a product or material may not fit the designation indicated in section MT 601. In these cases, submit documentation demonstrating or justifying the supplier or manufacturer’s position that their specific item has been misclassified to the Project Manager at least 10 business days in advance of installation. the Department, in conjunction with FHWA, will review the submitted documentation and decide as to how that specific product or material will be classified. These determinations will be final and will require the appropriate necessary documentation as defined above.

The US DOT has found that it is in the public interest to issue a waiver of BABA’s domestic preferences in certain situations. For Construction Materials, the domestic preference may be waived if the total value of non-compliant material is under $1,000,000 or 5% of the total applicable project costs, whichever is less. Submit actual individual material costs, minus manufacturing costs outside the defined manufacturing processes outlined above, along with justification in the form of invoices, bills of lading, or other appropriate documents to the Department if requesting the waiver.

The above waiver does not apply to iron and steel and the existing de minimis standard for iron and steel under 23 CFR 635.410(b)(4) continues to apply.

Projects with a total contract value of $500,000 or less are exempt from all domestic preference regulations including steel and iron.

18. STATUS OF UTILITIES [108] (ADDED 1-1-03)

Utility relocation work is not complete and will not be complete as of the letting date and contract award date. Project work must be coordinated with the utility company relocation activities until the utility relocation work is complete. Under no circumstances will a delay in relocating utility facilities be considered as justification for additional compensation.

Should unforeseen conditions arise which substantially delay the utility relocation work, and the delay results directly in a delay to the project work, make a written request to the department for a time extension, see Subsection 108.07.4.

19. SUBCONTRACTING CONSULTANTS [108] (REVISED 2-27-14 M)

The following consultants performed work on the project.

- DOWL
- Utility Mapping Services, Inc.
- DJ&A

20. NOTICE TO BIDDERS [108] (ADDED 11-21-08)

This project is funded in whole or in part by funds received from the Federal Highway Administration (FHWA), and its construction is wholly contingent on the state's continued receipt of those federal funds. If the federal funds are reduced or not received, the Department may choose to terminate the contract for convenience under the provisions of Subsection 108.10. Any bidder on this project, by submitting its bid, understands and accepts the possibility of the contract being terminated in the event federal funds are reduced or not available and by submitting a bid, each bidder waives any claims for costs or damages other than as specifically allowed by Subsection 108.10.2. In particular, bidders understand and accept that no payment will be allowed for any claimed anticipated profit for work not performed.

21. ENVIRONMENTAL SPECIFICATIONS [208] (ADDED 9-9-21M)

The Contractor is required to review and meet the specifications of the following subsections:

Aquatic Resource Protection	Subsection 208.03.2A
Migratory Bird Treaty Act Compliance – Vegetation Removal	Subsection 208.03.4A(1)
Migratory Bird Treaty Act Compliance - Structures	Subsection 208.03.4A(2)
AIS Watercraft and Equipment Inspection	Subsection 208.03.2D

22. CLEAN WATER ACT SECTION 404 PERMIT AND SECTION 401 CERTIFICATION

A. Description. The permanent features as described in this contract do not impact Waters of the US and therefore do not require a Clean Water Act (CWA) Section 404 Permit or Section 401 Certification. However, temporary fills in waters of the US, such as work bridges, work pads, cofferdams, diversions, or other temporary facilities associated with project construction will likely require a Section 404 Permit and 401 Certification for temporary facilities.

B. Section 404 CWA Nationwide Permit 33 Description. Obtain authorization for the temporary features of this project (e.g. work bridges, work pads, cofferdams, diversions, etc.) under a US Army Corps of Engineers Nationwide Permit 33 – Temporary Construction, Access, and Dewatering.

1) Acquire a CWA Section 404 Permit and 401 Certification for temporary facilities involving placement of fill in waters of the US. MDT is not responsible for delays caused by incomplete or inaccurate submittals by the Contractor. Submit a joint application in accordance with Section 208.03.3 for projects:

a) Within the following waterways and their impoundments: Kootenai River, Missouri River, Yellowstone River, Bitterroot River, Clark Fork River (tributary to the Columbia River), Flathead River, Flathead Lake, and Milk River;

b) Located within 100 feet of the water source in natural spring areas;

c) Within the boundaries of any Tribal Reservation or Tribal trust lands;

d) Within Special River Management Zone of the Upper Yellowstone River.

2) For all other temporary discharges, submit a written description to the Project Manager detailing the temporary facilities planned for the project, along with the associated restoration plan. Allow 5 working days for the Project Manager to review the plan and confirm

CWA 404 pre-construction notification is not required. For temporary discharges authorized under Nationwide Permit 33 without pre-construction notification, the authorization is valid until March 14, 2026.

Coordinate with the engineering project manager if you have questions regarding this authorization. Proposed changes to the permanent structures should be directed to the project manager for coordination with the District Project Development Engineer in the Environmental Services Bureau. Temporary facility permitting and/or general permit questions should be directed to the project manager for coordination with the District Environmental Engineering Specialist.

23. MOISTURE SENSITIVE SOILS [203]

A. Description. Subsurface investigation for this project indicates that subgrade and/or foundation soils located within the project limits are sensitive to changes in moisture content, and may cause construction difficulties. Use construction methods and equipment appropriate for moisture-sensitive soils.

B. Construction. Unless otherwise specified in the contract or by the Project Manager, limit the length of subgrade exposed to precipitation events to an amount that can be adequately sealed by the contractor within 30 minutes of the start of a precipitation event.

Many possibilities are available to facilitate construction and to achieve proper compaction of the subgrade or foundation soils in the project limits. The Department does not direct the use of any of them. However, in preparing bids, identify measures to address the identified conditions. Some possibilities to consider are:

1) Sealing the surface of all exposed subgrade/foundation by rolling with a smooth drum roller whenever work at a particular location is interrupted for 6 or more hours and at the end of each work day;

2) Grading and sloping the surface of all exposed subgrade/foundation to facilitate unimpeded surface drainage away from the work area; and/or,

3) Allowing soils to adequately dry (including after precipitation events) before attempting any type of construction work on the subgrade/foundation soils.

C. Method of Measurement and Basis of Payment. Include all costs for the method(s) chosen to effectively address construction on moisture sensitive soils in the bid item for Detour-Construct, Maintain, Remove per lump sum. No additional compensation will be allowed or given for claimed increased costs to address that portion of the work addressed by this provision.

24. STORM WATER PERMITTING REQUIREMENTS UNDER THE MT POLLUTANT DISCHARGE ELIMINATION SYSTEM (MPDES) [208] (REVISED 8-10-23)

A. Description. The DEQ regulates storm water discharges under the MPDES program. If the bid package contains blank erosion control plans, a construction storm water discharge permit authorization will be required. If not, a storm water discharge permit authorization may be required for this project depending on Contractor’s operations. Sum the disturbance area (as defined by DEQ) identified in the contract with the area of disturbance caused by contractor operations to determine if the permit acreage threshold is exceeded. Contractor operations can include, but are not limited to, the following support activities: staging areas, access roads, material storage areas, temporary concrete, or asphalt batch plants, borrow areas, areas used for fill placement, etc. If the summed disturbance area is one acre or more, use the DEQ authorization to discharge under the MPDES General Permit for Storm Water Discharges Associated with Construction Activity (General Permit) for this project. In order to facilitate permit transfer, separate NOI packages are required for areas within the right-of-way and areas outside of the right-of-way. A NOI package includes a Notice of Intent, with a topographic map, a SWPPP, the erosion control plans, sage grouse consultation letter, if applicable, and supporting documentation.

Blank Erosion Control Plans, and a topographic map, are provided with the plans if the plans include greater than 1 acre of disturbance. Complete the erosion control plans as required by the general permit. Complete the SWPPP using DEQ's most current SWPPP Form.

B. Materials. Follow the requirements described in the Department's *Erosion and Sediment Control Best Management Practices Manual (December 2016).* Rescind Section 208 detailed drawings. Submit to the Project Manager for review and acceptance BMPs proposed for use that are not included in the Manual.

C. Construction Requirements.

1) MPDES Permit Required.

a) Submit one NOI package and the associated fees to DEQ for ground disturbance areas shown in the plans or within the right-of-way. For ground disturbance areas shown in the plans and any other areas within the right-of-way where Contractor activities causing ground disturbance are planned, the Contractor is the sole permittee until construction is complete and the General Permit is transferred to the Department or another entity.

The Department is not responsible for delays caused by incomplete or inaccurate submittals by the Contractor.

Comply with the requirements of the General Permit and implement the SWPPP. Provide an electronic copy of the NOI Package submitted to DEQ and confirmation for receipt of a complete NOI Package from DEQ to the Project Manager prior to conducting any ground disturbance activities.

Do not begin construction activities until the required copy of the NOI Package submitted to DEQ and confirmation for receipt of a complete NOI Package from DEQ is received by the Project Manager.

b) Furnish and install public signage as required by the General Permit. Include the cost of the required sign(s) in the Temporary Erosion Control Lump Sum bid item. Submit a separate NOI package and the associated fees to DEQ for ground disturbance and support activity areas outside the right-of-way and not shown in the plans. Contractor furnished material sources, staging areas, plant sites, or any other Contractor caused ground disturbance outside the right-of-way and not shown in the plans, are the Contractor's responsibility and must be submitted under a separate NOI package from the ground disturbance within the right-of-way. For all support activities outside the right-of-way which are not part of a larger commercial operation serving multiple unrelated construction activities and will not continue operation beyond the completion of the contracted road construction activity, a notice of intent package must be submitted to DEQ to obtain an authorization under the General Permit. Sand and gravel borrow area operations, gravel pits, and/or concrete batch plants that will continue operation beyond the completion of the contracted road project, are part of a larger commercial operation, or serving multiple unrelated construction activities, must obtain permit coverage under the Multi-Sector General Permit for Storm Water Discharges Associated with Industrial Activity (MSGP) regardless of acreage size of the activity if the activity does not already have MSGP authorization. The Contractor is the sole permittee until stabilization is complete and the General Permit is terminated or transferred to another entity. The Department is not responsible for delays caused by incomplete or inaccurate submittals to DEQ by the Contractor.

Provide copies of all NOI Packages submitted to DEQ and confirmations for receipt of complete NOI Packages from DEQ to the Project Manager prior to conducting any ground disturbance activities.

Be responsible for all temporary erosion, sediment, and pollution prevention controls for Contractor furnished material sources, staging areas, plant sites, or any other Contractor caused ground disturbance outside the right-of-way and not shown in the plans.

c) Complete and document all inspections in accordance with the requirements of the General Permit. Use DEQ's most current self-inspection form available online at: https://deq.mt.gov/files/Water/WQInfo/Documents/WPBForms/2023-Attachment-B-

MTR100000.pdf. Provide a copy of all inspection reports to the Project Manager within 7 calendar days of the inspection.

Report potential noncompliance in accordance with applicable regulations, guidance, and permit conditions. Submit to the Project Manager within 7 calendar days of sending or receiving all correspondence to or from regulatory agencies regarding potential noncompliance or violations.

The temporary erosion and sediment control measures and devices to prevent pollution and control sediment transport and soil erosion will be inspected as part of the final inspection to ensure they are maintained and functioning properly. Do not transfer or terminate the General Permit coverage until the BMPs are inspected and accepted and all records required under the permit, including inspection and monitoring reports, are furnished to the Project Manager and authorization is received from the Department. The Department may require that certain BMPs be replaced by another type of BMP as a condition of permit transfer.

Upon approval of site conditions, measures, devices and all pertinent records, the Department will notify the Contractor to begin the Permit Transfer Notification in DEQ FACTS. Once completed, provide verification that all fees have been paid and the permit is ready for transfer in DEQ FACTS. The Department is not liable for the completeness or accuracy of Contractor records completed prior to the permit transfer. Ensure permit conditions and responsibilities are met until confirmation of the transfer is received from DEQ. Defend and hold the Department harmless from any violations, claims, enforcement actions, penalties or fines issued for Contractor activities or recordkeeping that occurred prior to the transfer of the General Permit.

If the Department concurs that final stabilization has been met during the final walk-through, the Contractor may submit a Notice of Termination form to DEQ. Pay the annual fee invoice due at the time of termination. Submit the annual fee invoice to the Project Manager for reimbursement.

2) MPDES Permit not Required.

The BMP-Administration item is included in contracts that may not meet either criteria for an MPDES permit but include ground disturbing activities. Complete BMP inspections and install BMPs, if necessary, in accordance with Section 208, if no storm water permit is required. Utilize form MDT-ENV-014, Water Pollution Control Inspection Report. A certified SWPPP Administrator is not required to conduct the inspections if no permit is required.

D. Method of Measurement. DEQ MPDES fees and monitoring costs associated with obtaining and maintaining the General Permit for ground disturbance areas both within and outside the right-of-way are not measured separately for payment.

If no permit is necessary, include the cost of all erosion control, devices, and inspections in the BMP-Administration bid item.

E. Basis of Payment. No additional payment will be made for the DEQ MPDES fees and monitoring costs associated with the General Permit. Include these costs in the Temporary Erosion Control-Lump Sum bid item.

For project including the BMP-Administration item, include the cost of all erosion control, devices, and inspections in the BMP-Administration bid item. Partial payment for the BMP-Administration will be monthly based on the lump sum contract price in accordance with Table 208-2 in Subsection 208.05.1.

Payment for BMPs required by an event or extra work, and approved by the Project Manager, will be measured and paid for in accordance with the Erosion Control Rate Schedule contained in the contract at a unit price of $1.00 per unit.

25. MIGRATORY BIRD TREATY ACT COMPLIANCE - STRUCTURES

A. Description. Bats and migratory birds may nest on the structures affected by this project. This special provision modifies Standard Specification subsection 208.03.4A.

B. Construction Requirements. Delete subsections 208.03.4A.2.c.ii and 208.03.4A.2.c.iii. Replace subsection 208.03.4A.2.c.i. with the following.

1) Cover or enclose all potential nesting and roosting surfaces on the structure with hardware cloth, geotextile, or other suitable material approved by the MDT Environmental Bureau to prevent birds and bats from establishing new nests and roosts. Use netting or other material with no opening or mesh size greater than 1/8-inch. Maintain the material/enclosure until the contract completion date.

C. Method of Measurement and Basis of Payment. Work related to Migratory Bird Treaty Act Compliance – Structures is paid for as Miscellaneous Items-Each measured per each structure. Payment for all costs associated with materials, labor, tools, equipment, and incidentals necessary to complete the work described under this item, is included in the price bid per each for Miscellaneous Items-Each.

26. GREATER SAGE-GROUSE CONSERVATION

A. Description. Greater Sage-Grouse is a species of concern under state management actions: Executive Order (E.O.) No.12-2015, No. 21-2015, and Montana Greater Sage-Grouse Stewardship Act. These management actions established procedures and stipulations for activities in designated general and core Greater Sage-Grouse habitat and connectivity areas.

Segments of this project occur in designated general and core habitat for the Greater Sage-Grouse. Specifically, designated general habitat overlaps MT-200 between approximate RP 107.04 and RP 114.61. Designated core habitat overlaps MT-200 between approximate RP 114.61 and RP 136.04. The project limits are within 2.0-miles of an active lek between approximate RP 119.64 and RP 120.43 on MT-200. The remainder of the project limits are not within 2.0-miles of an active lek.

B. Requirements.

1) Do not perform any construction activity between the hours of 7:00 pm and 8:00 am between March 1st and July 15th between RP 117.96 RP 120.5 on MT-200 to comply with E.O stipulations. Traffic control is not subject to this timing restriction. Perform traffic control in accordance with the requirements found elsewhere in the contract.

2) Weed management is required within designated habitat for Greater sage-Grouse. Reclamation of disturbed areas must include control of noxious weeds and invasive plant species, including cheatgrass (Bromus tectorum) and Japanese brome (Bromus japonicus).

3) Coordinate with the MSGHCP (https://sagegrouse.mt.gov/) on all contractor responsible activities located outside MDT Right-of-Way in designated Sage-Grouse habitats which require the contractor to obtain a state permit or authorization prior to conducting work. MDT has completed consultation with the MSGHCP only for proposed work located within MDT Right-of-Way. A copy of the consultation letter from the MSGHCP is available upon request from Environmental Services.

C. Measurement and Basis for Payment. Work described in this provision is not measured for payment. Consider all costs, including any mitigation required by the MSGHCP, associated with this provision incidental to performance of the work. Include the cost in other items.

27. MISCELLAENOUS ITEMS-LS (BAT BOX)

A. Description. Install bat boxes at the approximate locations shown in the plans or as directed by the EPM or Biologist prior to construction activities. The bat box is a permanent feature to remain post construction.

B. Materials.

1) Bat Box. Furnish a three or more chambered bat box no less than 6.5 inches x 20 inches x 12 inches made of solid wood.

2) Flashing. Furnish sheet metal that is smooth, shiny, and can be affixed around a post or tree, no less than 24 inches in width.

3) Post. Provide a 20-foot tall 6-inch x 6-inch pressure treated wood post or 6-inch diameter metal post.

C. Submittal. Submit product and design information to MDT for approval five days prior to construction. If the post requires a foundation design, provide design documents stamped by a professional engineer registered and licensed to conduct engineering in the State of Montana.

D. Construction.

1) Coordinate bat box location(s) with the EPM or MDT District Biologist prior to April 1st. Install bat boxes at these locations outside of the highway clear zone concurrent with MBTA structure netting.

2) Securely mount the bat box per the manufacturer's specifications at a minimum height of 12 feet measured from the ground to the base of the box. If mounted to a tree, avoid locations on trees that are heavily shaded by branches.

3) Provide an open space around and below the bat box with few branches and low or no understory vegetation that may impede flight access. Avoid areas with thorny vegetation or common burdock, as this vegetation can injure or kill bats.

4) Install metal flashing around the post to reduce predation risk. Cover the entire circumference of the post with flashing a minimum of 24 inches in height measured from the ground up to a height of 5 feet measured from the ground.

E. Method of Measurement and Basis of Payment. Bat boxes are measured per lump sum and include all resources necessary to complete the item of work. Payment for completed and accepted quantities of bat boxes is paid at the contract unit price for Miscellaneous Items-LS.

28. BRIDGE DEMOLITION NOTIFICATION

A. Description. Prior to demolition of structures in Montana, including highway bridges, MDT is required to submit a notification form to the Montana Department of Environmental Quality (DEQ) Asbestos Control Program (ACP). The Montana Demolition Notification form MTACP02 is available at http://deq.mt.gov/Public/asbestos/Forms. Direct questions regarding this special provision to the construction Project Manager (PM).

Inspections were completed on the bridges for asbestos containing materials. The inspection included a review of as-built drawings, documentation of bridge material conditions including inspection photos, and sampling of suspect materials. The inspection did not identify any asbestos containing materials on any of bridges. A copy of the asbestos inspection report is available from MDT.

B. Construction Requirements. Submit the completed form to the DEQ-ACP and the construction PM a minimum of 10 days prior to renovation activities. Provide a copy of the notification acknowledgement to the construction PM upon receipt from the DEQ-ACP. Maintain a copy of the inspection report on site during demolition.

C. Measurement and Payment. Measurement and payment for the notification submittal is included in other items.

29. SALVAGED MATERIAL

A. Description. Salvage, deliver, and stockpile various timber girders, timber caps, timber piles, timber decking, timber backwall planking, timber sway bracing, steel sister girders, and steel caps for MDT and Fergus County. Note that the timber components are treated with creosote and therefore, are considered treated timber.

B. MDT Designated Salvage Materials.

1) Timber Girders. Salvage the following quantities of timber girders:

a) 40 girders of nominal 19-foot span length.

2) Timber Caps. Salvage the following quantities of nominal 12" x 12" timber caps:

a) Minimum of 80 linear feet of timber cap. Each salvaged member must be a minimum of 16 feet in length.

3) Timber Piles. Salvage the following quantities of timber piles with a nominal diameter between 10” and 14”:

a) Minimum of 144 linear feet of timber pile. Each salvaged member must be a minimum of 12 feet in length.

4) Timber Decking. Salvage the following quantities of timber nail-laminated decking (consists of nail laminated 2” x 4” timbers):

a) Minimum of 70 feet linear feet of decking. Salvage decking in full bridge width sections (approximately 30 feet +/-). This equates to approximately 1200, 2” x 4” x ~26 feet long timbers. Each salvaged section of decking may consist of any number of nail-connected 2” x 4” timbers at the contractor’s discretion.

5) Timber backwall planks. Salvage the following quantities of nominal 3” x 12” timber backwall planks:

a) Minimum of 150 linear feet of timber planks. Each member must be a minimum of 15 feet in length.

6) Steel Channels. Salvage two steel, 8 foot long, C12 x 20.7 channels attached to the bent 4 cap on Bridge # 06005.

7) Material less than the minimum dimensions will be inspected on site by a Department representative who will determine if the material will be salvaged or if the material can be disposed.

C. Fergus County Designated Salvage Materials.

1) Timber Girders. Salvage all remaining timber girders for Fergus County.

2) Timber Caps. Salvage all remaining quantities of nominal 12” x 12” timber caps for Fergus County.

a) Each salvaged cap member must be a minimum of 10 feet in length.

3) Timber Piles. Salvage all remaining quantities of timber piles with a nominal diameter between 10” and 14” for Fergus County.

a) Each salvaged pile member must be a minimum of 10 feet in length.

4) Timber Backwall Planks. Salvage all remaining quantities of timber backwall planks for Fergus County.

a) Each salvaged plank member must be a minimum of 10 feet in length.

5) Impact attenuators and guardrail. Salvage all impact attenuators and guardrail equal to or greater than 10 feet in length for Fergus County.

D. Timber Quality Requirements.

1) Dispose of material this is broken, cracked (normal checking is acceptable), split, has any sign of rot or decay, or is damaged during salvage operations.

E. Construction Requirements. Remove the structures in accordance with Section 202 of the Standard Specifications and these Special Provisions.

1) MDT Designated Salvage Materials. Use a flatbed transport to deliver the MDT designated salvaged material to the Lewistown Maintenance Stockpile Yard located approximately 3 miles west of Lewistown on Highway 87 at R.P. 76.2. MDT will provide forked equipment and personnel to unload and stockpile salvaged material. Do not “dump” salvaged materials at the MDT Stockpile Yard.

a) Contact Dave Harrell, MDT Lewistown Maintenance Superintendent, at 406-538-1302 at least 2 weeks in advance of delivery to coordinate delivery times.

2) Fergus County Designated Salvage Materials. Use a flatbed transport to deliver the Fergus County designated salvaged material to the Fergus County Yard located at 81 Armory Rd, Lewistown, MT 59457. Fergus County will provide forked equipment and personnel to unload and stockpile salvaged material. Do not “dump” salvaged materials at the Fergus County Yard.

a) Contact John Anderson, Fergus County Road & Bridge Supervisor, at 406-535-5006, at least three weeks in advance of delivery to coordinate delivery times.

3) Coordinate a timeline with the Project Manager to Remove or Dispose of any material that remains after eight weeks of the initial verbal notification of delivery intent to the potential owners of the salvaged materials and after four weeks of the potential owners being subsequently contacted in writing (Cc the Project Manager on the written notification). Dispose of all non-salvageable and any left-over salvageable material not intended to be reused by the Contractor in accordance with all applicable laws, rules and regulations. Pay special attention to the following responsibilities:

a) Burning or burial of treated timbers and bridge decking is not an acceptable means of disposal under any circumstances.

b) Dispose of treated timbers not salvaged by MDT, Fergus County, or the Contractor for reuse in a licensed Class II landfill only. Advance written approval of the landfill manager may be required. If the landfill requires sampling of the timbers, the Project Manager will perform the sampling.

F. Basis of Payment. Payment for all costs associated with the disposal or salvage of all material and all costs of furnishing all materials, equipment, tools, and labor necessary and incidental to completing the work described under this item, is included in the lump sum bid for Remove Structure.

30. LEAD-BASED PAINT (LBP) REMOVAL AND DISPOSAL

A. Description. Lead and other heavy metal-based paint removed from highway bridge structures is considered a hazardous waste.

The paint was tested utilizing field X-Ray Fluorescent (XRF) methodology that determined that lead is present in the paint on the Bridge Rail and the Bridge Rail Supports on structures 06005. The affected components are the painted guard rail posts on the structures. The highest concentration detected was 7.2 mg/cm^2. Lead-based paint can cause serious health effects on workers and the environmental if precautionary measures are not conducted.

B. Construction Requirements.

1) Do not remove any paint covering the existing steel structure if not necessary for demolition. Salvage steel coated with lead-based paint with the paint left on. Do not allow paint to escape into the environment. Immediately halt work if lead-based paint waste is observed to be entering the environment and re-evaluate work procedures to prevent any release of lead-based paint to the environment.

2) If lead paint is disturbed as necessary for demolition, containerize and dispose of any lead-based paint waste in accordance with applicable regulations, which may include RCRA regulations (40 CFR Parts 266-299). Comply with all storage and transportation requirements.

3) Salvage the existing steel structure in accordance with applicable state and federal regulations. Recycling is the preferable method of dealing with metal components collated with lead paint and the lead expansion plates. A copy of the inspection report is available for the recycler and/or landfill.

C. Contractor Responsibilities.

1) Be familiar with and perform all work in accordance with all applicable standards provided in the Code of Federal Regulations, Title 29 Part 26, including the OSHA Hazard Communication Standard (29 CFR 1926.59), the OSHA Lead Standard (29 CFR 1926.62), and the OSHA Respiratory Standard (29 CFR 1926.134); the Resource Conservation and Recovery Act (40 CFR Parts 266-299), and Administrative Rules of Montana Title 17 Chapter 53. To obtain copies of the Federal regulations, contact the U.S. Governments Printing Office at (202) 783-3238. Questions concerning state regulations or to obtain copies of state regulations, contact the Montana Department of Environmental Quality, Hazardous Waste Program at 406-444-5300.

2) Be entirely responsible for all health and safety requirements for workers when cutting and handling any bridge material coated with lead-based paint.

D. Basis of Payment. Include the costs associated with the requirements of this special provision in the cost of other items.

31. ALTERNATE PRESTRESSED BEAM SECTIONS (REVISED 6-6-12)

A. Description

1) General. The contractor may elect to use an alternate prestressed beam shape if the resulting change in superstructure depth is less than or equal to the maximum allowed increase shown in the table below.

2) Submittals.

a) Provide two sets of designs that meet the AASHTO and Montana Specifications shown on the Plans, to the Project Manager for review and approval. Show calculations for the beams, slab, and reinforcing steel. Provide design information as required to either validate or alter the substructure as shown.

Bridge at Station	Maximum Allowed Increase in Superstructure Depth
721+14.14	0 inches
849+53.18	0 inches

b) Provide five sets of shop drawings to the Project Manager meeting the requirements of Section 553 of the Standard Specifications. Shop drawings may be submitted on 11” x 17” sheets and may be furnished in Adobe Acrobat Reader (.pdf) format in lieu of hard copies. Have a professional engineer licensed in Montana sign, stamp or seal these plans and designs. Do not fabricate beams prior to receiving approved drawings.

c) Provide a revised set of design drawings showing all changes to the bridge. Prepare the drawings using a CAD system. Submit the drawings in Adobe Acrobat Reader (.pdf) format. Include a cover letter signed by the supervising engineer transmitting the finished drawings. In addition, provide the CAD files used to detail the revisions. Upon request, the original design drawings will be made available.

B. Measurement and Payment. The beam and slab shown on the plans will be the configuration measured or calculated for payment. Furnish and install at no cost to the state any additional beam footage, slab concrete or slab reinforcing steel, or substructure concrete or reinforcing steel required because of the use of alternate beam shapes.

32. PRESTRESSED BEAM

A. Description. This work entails procurement of prestressed concrete beams for sites 06005 and 06101 including inspection and storage at the fabrication site and transport to the respective sites at the direction of the EPM or by the contract completion date.

B. Materials. Furnish materials meeting the requirements of Section 553.02 of the Standard Specifications as indicated in these contract documents.

C. Construction. Comply with requirements of Sections 553.03.01 through 553.03.15 of the Standard Specifications and as noted below.

1) Notify the department of fabrication completion and make members available for inspection at the manufacturing plant immediately upon completion. Coordinate a time for the Department to inspect materials with the project EPM.

2) Arrange for temporary storage of materials at the manufacturing plant or other location as approved by the EPM.

3) Schedule and provide transport of the materials to the appropriate project sites at the direction of the EPM or by the contract completion date.

D. Method of Measurement and Basis of Payment. The work as described in this special provision and in the Standard Specifications is measured and paid for in accordance with Sections 553.04 and 553.05 of the Standard Specifications.

33. FURNISH STEEL PILE-PIPE

A. Description. This work entails procurement of piling for sites 06005 and 06101 including inspection and storage at the fabrication site and transport to the respective sites at the direction of the EPM or by the contract completion date.

B. Materials.

1) Furnish materials meeting the requirements of Section 559.02 of the Standard Specifications as indicated in these contract documents. Provide the following steel pile-pipe to the following locations.

a) 06005 (Briggs Coulee) – 41,730 pounds of 18-inch diameter x 1/2-inch wall thickness.

b) 06101 (Elk Creek) – 32,898 pounds of 16-inch diameter, 1/2-inch wall thickness.

C. Delete the following requirements of Subsection 559.02.3.

1) Weld driving point or cutting shoe to steel pile in accordance with ANSI/AASHTO/AWS D1.1 or D1.5, as applicable. Use welders certified by the Department or a Certified Welding Inspector.

D. Construction.

1) Delete section 559.03 of the standard specification.

2) Notify the department of fabrication completion and make members available for inspection at the manufacturing plant immediately upon completion. Coordinate a time for the Department to inspect materials with the project EPM.

3) Arrange for temporary storage of materials at the manufacturing plant or other location as approved by the EPM.

4) Schedule and provide transport of the pile and cutting shoes to the appropriate project sites at the direction of the EPM or by the contract completion date.

E. Method of Measurement and Basis of Payment. The work as described in this special provision and in the Standard Specifications is measured and paid for in accordance with Sections 559.04 and 559.05 of the Standard Specifications.

34. CLASS GENERAL CONCRETE [551] (ADDED 11-16-23)

The Project Manager may allow “cast in place” placement of Class General Concrete without a formal mix design for items not related to sidewalks, curbs, or gutters. Submit a batch proportioning sheet meeting the requirements for Class General Concrete in accordance with Table 551-2 three calendar days prior to placement. Include all material in the mixture on a cubic yard basis. Class General Concrete will be tested and accepted in accordance with MT 601.

35. IMPACT ATTENUATOR – TEMPORARY [606] (REVISED 1-21-21)

A. Description. This work is furnishing, installation, maintenance, and removal of temporary impact attenuator and crash cushion devices when construction activities expose blunt ends, ends of barriers, fixed objects, or other obstacles within the clear zone.

B. Materials. Furnish devices, including required transition sections that meet MASH crash test requirements. Devices meeting NCHRP 350 requirements are acceptable if manufactured before January 1, 2020.

C. Construction Requirements. Submit the manufacturer’s installation instructions and proof of crash test compliance 14 calendar days prior to any work that will require the installation of devices.

Install devices at the locations shown of blunt or exposed ends of barriers or fixed objects in accordance with the manufacturer's installation instructions. The device must be installed within 12 hours from the time the obstacle is exposed.

Maintain at least one complete set of repair parts on the project at all times to repair or replace attenuators, which may be damaged during construction.

Attach the impact attenuator to the concrete barrier rail or other fixed objects using the manufacturer's approved transition section. Follow all manufacturers' instructions and guidance during the installation. Furnish and install all transitions, mounting hardware, and other necessary items.

Repair or replace damaged attenuators within 12 hours.

Remove the device within 48 hours of when the obstacle no longer exists. The devices remain the property of the Contractor after completion of the project.

D. Method of Measurement.

1) Temporary impact attenuators are measured for each complete installation shown on the plans. This includes furnishing, installing and the removal of one attenuator, one time.

2) Reset Temporary Impact Attenuator is measured by each and includes the complete reinstallation and removal of a temporary attenuator that was previously installed on the project and was moved to a new location.

Temporary removal/resetting of an attenuator to protect the same obstacle will not be measured for payment.

Removal, replacement, and repair of installations shown on the plans damaged by traffic will be paid in accordance with subsection 109.04. Installations and not shown on plans or the repair or replacement of temporary impact attenuators damaged by the Contractor will not be measured for payment.

E. Basis of Payment. Payment for the completed and accepted quantities is made under the following:

Pay Item	Pay Unit
Temp Impact Attenuator	Each
Reset Impact Attenuator – Temporary	Each

Payment at the contract unit price is full compensation for all resources necessary to complete the item of work under the contract.

36. LONG TERM VARIABLE MESSAGE BOARDS [618] (ADDED 3-09-23 M)

A. Description. Furnish, install, maintain, and remove two (2) portable variable message boards (VMS).

B. General.

1) Install VMS at the following locations or as approved by the Project Manager.

Location	Description	Duration
RP 119.4	One-way traffic notification approximately 0.5 mile from the detour.	Begin: Following completion of two-way detour End: Contract completion date.
RP 120.6	One-way traffic notification approximately 0.5 mile from the detour.	Begin: Following completion of two-way detour End: Contract completion date.

2) Install VMS 7 working days prior to the start of initial traffic control setup and construction operations. Provide traffic a warning message as approved by the Project Manager

and shown in the Contractor's Traffic Control Plan. This message will alert traffic to the upcoming project limits and suggest alternate route(s).

3) At the start of construction operations, provide a message warning traffic of the anticipated project delays and suggest alternate route(s) as approved by the Project Manager.

4) Remove VMS as directed by the Project Manager. VMS not removed within 12 hours of notification will be subject to a 15% deduction in the unit bid price for each instance.

5) Furnish VMS that meet MUTCD requirements.

6) VMS must be capable of providing 2 phases with 3 lines and 8 characters per line. Characters must be a minimum of 18 inch in height.

7) If a safe and visible installation location cannot be found, construct a pad that provides a safe, level location to install the message board adjacent to traffic.

C. Method of Measurement. Portable variable message boards will be measured by each.

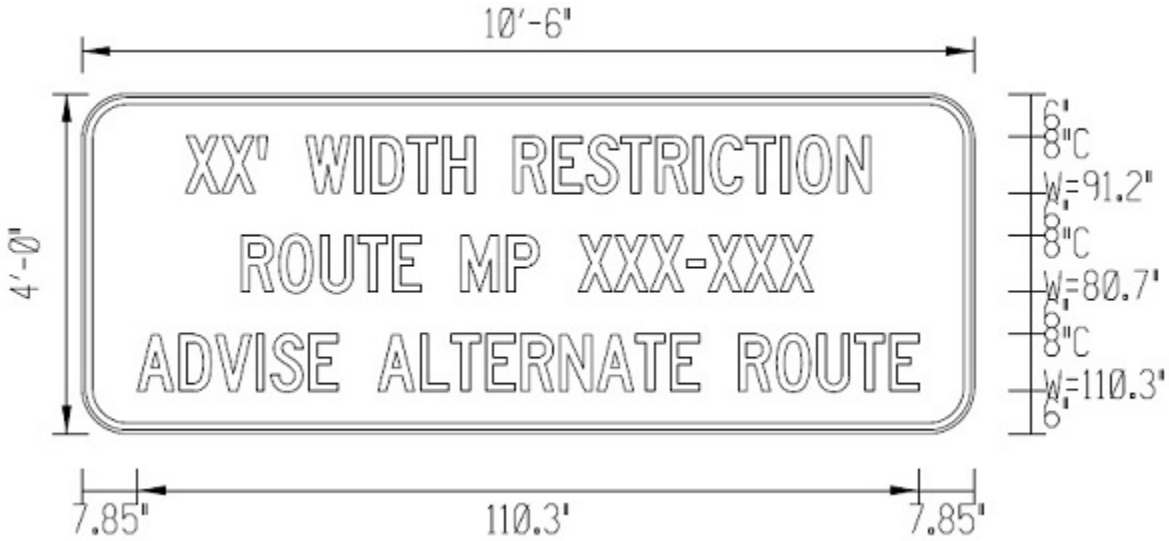
Construction of pad(s) will be measured and paid for in accordance with Subsection 109.04.

D. Basis of Payment. Portable variable message sign will be paid by each and includes all costs associated with installing, maintaining, and removing the boards. This item will be paid under bid item 618 100 005 Portable Variable Message Sign.

37. <u>WIDE LOAD ACCOMMODATIONS [618] (REVISED 11-18-21 M)</u>

Coordinate with the Project Manager to accommodate wide loads during construction. Provide passage of wide loads through the project area a minimum of 5 consecutive days/ week and two hours/day as approved by the Project Manager. Coordinate with the Project Manager to facilitate passage of wide loads on other projects on the same route or in proximity. Provide the Project Manager with the name and phone number of the person(s) to be contacted prior to wide loads arriving at the project site.

Place wide load detour signs at the following locations or as directed by the Project Manager. Furnish and install signs shown on the following detail, meeting Detailed Drawing 618-01. The ROUTE will specify the route number and MP will specify the milepost(s) of the work.



Sign information, if known:
12' Width Restriction
MT-200 MP 119.9 -120.1
ADVISE ALTERNATE ROUTE

Sign Location	Location Description
MT-200 and US-87 Junction	Adjacent to the east bound lane, east of the junction (exact location per EPM's discretion)
MT-200 and US-59 Junction	Adjacent to the west bound lane, west of the junction (exact location per EPM's discretion)

1) Traffic control devices are paid for by lump sum or at the contract unit price per unit of traffic control devices. The units of each type of traffic control device paid for are calculated by multiplying the measured quantity of each device by the value per each unit shown in the traffic control rate schedule.

2) Wide load detour signs will be paid for as Single Use Signs (SQ FT). Cover the signs during the winter suspension if necessary. No separate payment will be made to cover wide load detour signs during winter suspension.

38. TRAFFIC ACTUATED TEMPORARY SIGNALS [618] (REVISED 8-10-23M)

A. General. This project requires Type II level of service.

1) Type I. Furnish computer controlled, traffic actuated temporary signals that utilize motion detection and video to optimize traffic operations during construction. Utilize multiple signals as necessary that work as a system to control traffic.

2) Type II. Include a remote operator that watches the live video streaming from the signal to determine signal phasing and adjusts timing to respond to variations in traffic.

Optimize signal timing at each location.

B. Maintenance of Traffic. Two temporary signals will be used at the east and west extents of the Briggs Coulee detour during construction of the detour when two lane traffic cannot be maintained.

If the use of temporary signals is proposed or becomes necessary at other intersections throughout the project, utilize signals meeting the requirements of this provision.

C. Method of Measurement. Traffic actuated temporary signals will be measured per each individual signal per day.

D. Basis of Payment. Traffic actuated temporary signals will be paid under the bid item of traffic actuated temporary signals for each day per each individual signal used.

The use of pilot car(s) and/or flagger(s) used in conjunction with the signals is at the Project Manager's discretion and will be measured and paid for in accordance with Section 618.

39. TEMPORARY BARRIER RAIL [618] (REVISED 7-15-21)

A. Description. This work includes furnishing, installing, maintaining, and removing temporary barrier rail used for lane separation or protection of construction work zones from traffic.

B. Materials. Furnish concrete barrier rail in accordance with Section 605 and the Detailed Drawings. Alternative barrier design meeting NCHRP 350 TL-3 or MASH TL-3 crash testing may be used. Submit proof of crash testing compliance 14 calendar days prior to installation.

C. Construction Requirements. Furnish, install, maintain, and remove temporary barrier as required by the contract or manufacturer's instructions. Terminate the ends of temporary concrete barrier with a temporary impact attenuator or with approved blunt end protection as stated in the contract. Blunt end protection not shown on the plans is at Contractor expense.

Place 3” x 4” retroreflective markers every 10’ on the top of the temporary rail. Chip Seal tabs and raised rigid pavement markers are prohibited. Ensure reflective markers are in place on existing barrier rail and/or guardrail adjacent to temporary rail.

D. Method of Measurement. Temporary barrier rail will be measured by the foot (m) of barrier placed to protect or channelize traffic as specified in the plans. Transition pieces and terminal ends will be measured for payment. Installation or resetting of barrier rail; required by the Contractor’s operations and not shown on plans or the repair or replacement of temporary barrier rail damaged by the Contractor will not be measured for payment. Removal and replacement of installations damaged by traffic will be measured for payment.

E. Basis of Payment. Payment for the completed and accepted quantities is made under the following:

Pay Item	Pay Unit
Temp Barrier Rail	Foot (m)
Reset Temp Barrier Rail	Foot (m)

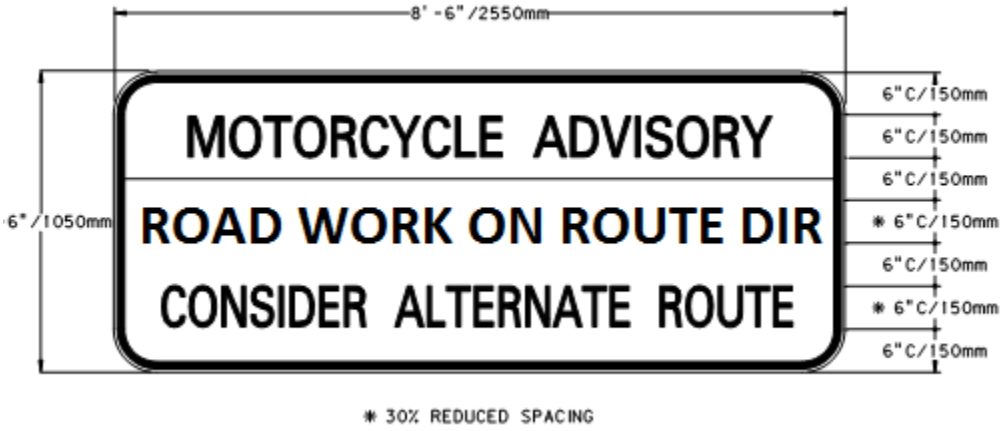
Payment at the contract unit price is full compensation for all resources necessary to complete the item of work under the contract.

40. MOTORCYCLE ADVISORY SIGNS [619] (REVISED 7-16-20)

A. Description. This work is the furnishing, installing, maintaining, and removal of motorcycle advisory signs.

B. Materials. Furnish materials meeting the requirements of Subsection 618.02. Furnish ASTM D4956 type VI or higher retro-reflective sheeting.

C. Construction Requirements. Furnish and install the signs shown on the following detail to the required typical cross section and profile grade, meeting Detailed Drawing 618-01, two-post installation, at the locations listed in the contract. The ROUTE will specify the route number and the DIR will specify the direction of the construction. The sign must meet the height requirements specified on the Detailed Drawing.



For rural intersections install sign(s) on the right shoulder within 1000 feet to 1500 feet (300 m to 450 m) in advance of the roadway’s intersection. For urban intersections install sign(s) within 200 feet (60 m) of the roadway’s intersection. Adjust sign within the specified distance to prevent obstruction from existing signs.

Install sign(s) no more than 2 calendar days before construction activities begin that change the roadway surface from a paved surface to an unpaved surface. Remove sign(s) within 2 calendar days after the roadway surface has a paved surface.

Coordinate with the Project Manager the date the sign(s) are to be installed, the verification of the sign locations, and the date of removal.

D. Method of Measurement. Motorcycle advisory signs, including all costs associated with labor, materials, tools and equipment required to provide, install and remove are measured by the Each.

E. Basis of Payment. Payment for the completed and accepted quantities is made under the following:

Pay Item	Pay Unit
Motorcycle Advisory Signs	Each

Payment at the contract unit price is full compensation for all resources necessary to complete the item of work under the contract.

41. SMART WORKZONE WALKBACK FLAGGER REPLACEMENT OPTION (END OF QUEUE DETECTION AND WARNING) [618] (ADDED 8-13-20)

A. Description. Furnish a smart work zone system capable of detecting and protecting the end of queue in lieu of a walk back flagger.

B. General.

1) End of Queue Detection and Warning. Furnish, install, maintain, adjust, and remove smart work zone technology to replace the walk back flagger. Install this system at flagging or signal control operations where a minimum of 10 vehicles are stopped at the location for more than 50% of the time or when sight distance to the signal or flagger is impaired.

a) Install radar sensors at the following signs: W3-3, R2-1, and W3-5.

b) Install a variable message board capable of displaying messages based on the input from the sensors 1500 feet from the estimated max queue location.

c) Adjust the radar sensors and message boards accordingly to protect the end of the queue.

d) Provide an online dashboard capable of showing the systems function and health in real time; including but not limited to:

(1) traffic speed at the individual sensors.
(2) battery life.
(3) system connectivity; and
(4) message displayed on the variable message board.

Average Speed at R2-1	VMS Phase 1	VMS Phase 2
> 35 MPH or when system is not in use.	Flashing Caution (4 corners)	
34 MPH to 30 MPH	Signal (or Flagger) Ahead	
29 MPH to 20 MPH	Slow Traffic Ahead	Prepare to Stop
< 20 MPH	Stopped Traffic Ahead	Prepare to Stop
Traffic Stopped at any Sensor	Stopped Traffic Ahead	Prepare to Stop
Fail Safe Mode	Signal (or Flagger) Ahead	Flashing Caution (4 corners)

Provide a failsafe system if communications go down or a fault is detected in the system for more than 2 minutes. Provide a system that will revert to a failsafe mode in which the message board will read “Signal or Flagger Ahead”

Sensor and message board locations must be included in the traffic control plan and approved by the Project Manager

Insert Network extender language if installing in areas of no cell coverage.

Provide speed data from sensors at the request of the Department.

2) Portable variable message signs. Furnish portable variable message signs that can execute the requirements set forth above. Furnish VMS that meet MUTCD requirements

3) Non-intrusive sensors. Furnish sensors that are portable, non-intrusive, capable of recording speed, detect traffic over multiple lanes, detect stopped traffic, and maintain performance in all weather conditions.

If a safe and visible installation location cannot be found, construct a pad that provides a safe, level location to install the message board adjacent to traffic.

C. Method of Measurement. Smart Work Zone Systems is measured by each system per day. One system is defined as one message board and 3 sensors.

D. Basis of Payment. Smart Work Zone Systems will be paid by each system at a rate of 500 units per day.

This item will be paid under group 37 of traffic control rate schedule.

END OF SECTION I.

MDT NONDISCRIMINATION AND
DISABILITY ACCOMMODATION NOTICE

Montana Department of Transportation ("MDT") is committed to conducting all of its business in an environment free from discrimination, harassment, and retaliation. In accordance with State and Federal law MDT prohibits any and all discrimination and protections are all inclusive (hereafter "protected classes") by its employees or anyone with whom MDT does business:

Federal protected classes	State protected classes
Race, color, national origin, sex, sexual orientation, gender identity, age, disability, income-level & Limited English Proficiency	Race, color, national origin, parental/marital status, pregnancy, childbirth, or medical conditions related to pregnancy or childbirth, religion/creed, social origin or condition, genetic information, sex, sexual orientation, gender identification or expression, ancestry, age, disability mental or physical, political or religious affiliations or ideas, military service or veteran status, vaccination status or possession of immunity passport

For the duration of this contract/agreement, the PARTY agrees as follows:

(1) Compliance with Regulations: The PARTY (hereinafter includes consultant) will comply with all Acts and Regulations of the United States and the State of Montana relative to Non-Discrimination in Federally and State-assisted programs of the U.S. Department of Transportation and the State of Montana, as they may be amended from time to time, which are herein incorporated by reference and made a part of this contract.

(2) Non-discrimination:

a. The PARTY, with regard to the work performed by it during the contract, will not discriminate, directly or indirectly, on the grounds of any of the protected classes in the selection and retention of subcontractors, including procurements of materials and leases of equipment, employment, and all other activities being performed under this contract/agreement.
b. The PARTY will provide notice to its employees and the members of the public that it serves that will include the following:
    i. A statement that the PARTY does not discriminate on the grounds of any protected classes.
    ii. A statement that the PARTY will provide employees and members of the public that it serves with reasonable accommodations for any known disability, upon request, pursuant to the Americans with Disabilities Act as Amended (ADA).
    iii. Contact information for the PARTY's representative tasked with handling non-discrimination complaints and providing reasonable accommodations under the ADA.
    iv. Information on how to request information in alternative accessible formats.

c. In accordance with Mont. Code Ann. § 49-3-207, the PARTY will include a provision, in all of its hiring/subcontracting notices, that all hiring/subcontracting will be on the basis of merit and qualifications and that the PARTY does not discriminate on the grounds of any protected class.

(3) Participation by Disadvantaged Business Enterprises (DBEs):

a. If the PARTY receives federal financial assistance as part of this contract/agreement, the PARTY will make all reasonable efforts to utilize DBE firms certified by MDT for its subcontracting services. The list of all currently certified DBE firms is located on the MDT website at mdt.mt.gov/business/contracting/civil/dbe.shtml

b. By signing this agreement, the PARTY assures MDT that:

The contractor, sub recipient or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the recipient deems appropriate.

c. The PARTY must include the above assurance in each contract/agreement the PARTY enters.

(4) Solicitation for Subcontracts, Including Procurement of Materials and Equipment: In all solicitations, either by competitive bidding, or negotiation, made by the PARTY for work to be performed under a subcontract, including procurements of materials, or leases of equipment, each potential subcontractor or supplier will be notified by the PARTY of the PARTY's obligation under this contract/agreement and all Acts and Regulations of the United States and the State of Montana related to Non-Discrimination.

(5) Information and Reports: The PARTY will provide all information and reports required by the Acts, Regulations, and directives issued pursuant thereto and will permit access to its books, records, accounts, other sources of information and its facilities as may be determined by MDT or relevant US DOT Administration to be pertinent to ascertain compliance with such Acts, Regulations, and instructions. Where any information required of a contractor is in the exclusive possession of another who fails or refuses to furnish the information, the PARTY will so certify to MDT or relevant US DOT Administration, as appropriate, and will set forth what efforts it has made to obtain the information.

(6) Sanctions for Noncompliance: In the event of a PARTY's noncompliance with the Non- discrimination provisions of this contract/agreement, MDT will impose such sanctions as it or the relevant US DOT Administration may determine to be appropriate, including, but not limited to:

a. Withholding payments to the PARTY under the contract/agreement until the PARTY complies; and/or

b. Cancelling, terminating, or suspending the contract/agreement, in whole or in part.

(7) Pertinent Non-Discrimination Authorities: During the performance of this contract/agreement, the PARTY, for itself, its assignees, and successor in interest, agrees to comply with the following non-discrimination statutes and authorities; including but not limited to:

Federal

- Title VI of the Civil Rights Act of 1964 (42 U.S.C. § 2000d *et seq.*, 78 stat. 252), (prohibits discrimination on the basis of race, color, national origin); and 49 CFR Part 21;
- The Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970, (42 U.S.C. § 4601), (prohibits unfair treatment of persons displaced or whose property has been acquired because of Federal or Federal-aid programs and projects);
- Federal-Aid Highway Act of 1973, (23 U.S.C. § 324 *et seq.*), (prohibits discrimination on the basis of sex);
- Section 504 of the Rehabilitation Act of 1973, (29 U.S.C. § 794 *et seq.*), as amended, (prohibits discrimination on the basis of disability); and 49 CFR Part 27;
- The Age Discrimination Act of 1975, as amended, (42 U.S.C. § 6101 *et seq.*), (prohibits discrimination on the basis of age);
- Airport and Airways Improvement Act of 1982, (49 U.S.C. § 471, Section 47123), as amended, (prohibits discrimination based on race, creed, color, national origin, or sex);
- The Civil Rights Restoration Act of 1987, (PL 100-209), (broadened the scope, coverage, and applicability of Title VI of the Civil Rights Act of 1964, The Age Discrimination Act of 1975, and Section 504 of the Rehabilitation Act of 1973, by expanding the definition of the terms "programs or activities" to include all of the programs or activities of the Federal-aid recipients, sub-recipients, and contractors, whether such programs or activities are Federally funded or not);
- Titles II and III of the Americans with Disabilities Act, which prohibits discrimination on the basis of disability in the operation of public entities, public and private transportation systems, places of public accommodation, and certain testing entities (42 U.S.C. §§ 12131-12189) as implemented by Department of Transportation regulations at 49 CFR parts 37 and 38;
- The Federal Aviation Administration's Non-Discrimination statute (49 U.S.C. § 47123) (prohibits discrimination on the basis of race, color, national origin, and sex);
- Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations, which prevents discrimination against minority populations by discouraging programs, policies, and activities with disproportionately high and adverse human health or environmental effects on minority and low-income populations;
- Executive Order 13166, Improving Access to Services for Persons with Limited English Proficiency, and resulting agency guidance, national origin discrimination includes discrimination because of Limited English Proficiency (LEP). To ensure compliance with Title VI, you must take reasonable steps to ensure that LEP persons have meaningful access to your programs (70 Fed. Reg. at 74087 to 74100);

- Title IX of the Education Amendments of 1972, as amended, which prohibits you from discriminating because of sex in education programs or activities (20 U.S.C. § 1681 *et seq.*).

- Executive Order 13672 prohibits discrimination in the civilian federal workforce on the basis of gender identity and in hiring by federal contractors on the basis of both sexual orientation and gender identity.

State

- Mont. Code Ann. § 49-3-205 Governmental services;

- Mont. Code Ann. § 49-3-206 Distribution of governmental funds;

- Mont. Code Ann. § 49-3-207 Nondiscrimination provision in all public contracts.

(8) Incorporation of Provisions: The PARTY will include the provisions of paragraph one through seven in every subcontract, including procurements of materials and leases of equipment, unless exempt by the Acts, the Regulations and/or directives issued pursuant thereto. The PARTY will take action with respect to any subcontract or procurement as MDT or the relevant US DOT Administration may direct as a means of enforcing such provisions including sanctions for noncompliance. Provided, that if the PARTY becomes involved in, or is threatened with litigation by a subcontractor, or supplier because of such direction, the PARTY may request MDT to enter into any litigation to protect the interests of MDT. In addition, the PARTY may request the United States to enter into the litigation to protect the interests of the United States.

Boring Log Descriptive Terminology

01/18/12

Key to Soil Symbols and Terms

SOIL CLASSIFICATION CHART

MAJOR DIVISIONS			SYMBOLS GRAPH	SYMBOLS LETTER	TYPICAL DESCRIPTIONS
COARSE GRAINED SOILS (MORE THAN 50% OF MATERIAL IS LARGER THAN NO. 200 SIEVE SIZE)	GRAVEL AND GRAVELLY SOILS (MORE THAN 50% OF COARSE FRACTION RETAINED ON NO. 4 SIEVE)	CLEAN GRAVELS (LITTLE OR NO FINES)		GW	Well-graded gravels, gravel sand mixtures, little or no fines.
				GP	Poorly graded gravels, gravel-sand mixtures, little or no fines.
		GRAVELS WITH FINES (APPRECIABLE AMOUNT OF FINES)		GM	Silty gravels, gravel-sand-silt mixtures.
				GC	Clayey gravels, gravel-sand-clay mixtures.
	SAND AND SANDY SOILS (MORE THAN 50% OF COARSE FRACTION PASSING ON NO. 4 SIEVE)	CLEAN SANDS (LITTLE OR NO FINES)		SW	Well-graded sands, gravelly sands, little or no fines.
				SP	Poorly graded sands, gravelly sands, little or no fines.
		SANDS WITH FINES (APPRECIABLE AMOUNT OF FINES)		SM	Silty sands, sand-silt mixtures.
				SC	Clayey sands, sand-clay mixures.
FINE GRAINED SOILS (MORE THAN 50% OF MATERIAL IS SMALLER THAN NO. 200 SIEVE SIZE)	SILTS AND CLAYS	LIQUID LIMIT LESS THAN 50		ML	Inorganic silts and very fine sands, rock flour, silty or clayey fine sands or clayey silts with slight plasticity.
				CL	Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays.
				OL	Organic silts and organic silty clays of low plasticity.
	SILTS AND CLAYS	LIQUID LIMIT GREATER THAN 50		MH	Inorganic silts, micaceous or diatomaceous fine sandy or silty soils, elastic silts.
				CH	Inorganic clays of high plasticity, fat clays.
				OH	Organic clays of medium to high plasticity, organic silts.
HIGHLY ORGANIC SOILS				PT	Peat and other highly organic soils.

NOTE: DUAL SYMBOLS ARE USED TO INDICATE BORDERLINE SOIL CLASSIFICATIONS

Order of Descriptors

- Group Name
- Consistency or Relative Density
- Moisture Condition
- Color
- Particle size descriptor(s) (coarse grained soils only)
- Angularity of coarse grained soils
- Other relevant notes

Criteria For Descriptors

Consistency of Fine Grained Soils

Consistency	N-Value (uncorrected)
Very Soft	< 2
Soft	2 - 4
Medium Stiff	5 - 8
Stiff	9 - 15
Very Stiff	16 - 30
Hard	> 30

Apparent Density of Coarse Grained Soils

Relative Density	N-Value (uncorrected)
Very Loose	< 4
Loose	4 - 10
Medium Dense	11 - 30
Dense	31 - 50
Very Dense	> 50

Moisture Condition

Dry	-Absence of moisture, dusty, dry to the touch.
Moist	-Damp, but no visible water.
Wet	-Visible free water.

Definition of Particle Size Ranges

Soil Component	Size Range
Boulder	> 12 in (300 mm)
Cobble	3 in (75 mm) - 12 in (300 mm)
Gravel	No. 4 Sieve (4.75 mm) to 3 in (75 mm)
Sand	No. 200 (0.075 mm) to No. 4 Sieves (4.75 mm)
Silt	< No. 200 Sieve (0.075 mm)*
Clay	< No. 200 Sieve (0.075 mm)*

*Atterberg limits and chart below to differentiate between silt and clay.

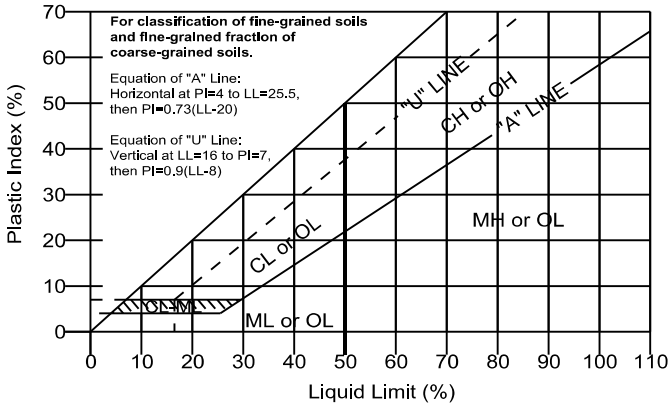
Notes

See Soil Boring Information Special Provision.

SPT (Standard Penetration Test-ASTM D1586):
The number of blows of a 140 lb (63.6 kg) hammer falling 2.5 ft (750 mm) used to drive a 2 in (50 mm) O.D. Split Spoon sampler for a total of 1.5 ft (0.45 m) of penetration.
Written as follows:
first 0.5 ft (0.15 m) - second 0.5 ft (0.15 m) - third 0.5 ft (0.15 m) (ex: 1-3-9)
Note: if the number of blows exceeds 50 before 0.5 ft (0.15 m) of penetration is achieved, the actual penetration rounded to the nearest 0.1 ft (0.03 m) follows the number of blows in parentheses (ex: 12-24-50 (0.09 m), 34-50 (0.4 ft), or 100 (0.3 ft)).WR denotes a zero blow count with the weight of the rods only.
WH denotes a zero blow count with the weight of the rods plus the weight of the hammer.

MC=Moisture Content, LL=Liquid limit, PL=Plastic Limit
-200%=percent soil passing 200 sieve, DD=Dry Density

Soil Classifications are Based on the Unified Soil Classification System, ASTM D2487 and D2488. Also included are the AASHTO group classifications (M145). Descriptions are based on visual observation, except where they have been modified to reflect results of laboratory tests as deemed appropriate.



Angularity of Coarse-Grained Particles

Angular	-Particles have sharp edges and relative plane sides with unpolished surfaces.
Subangular	-Particles are similar to angular description, but have rounded edges.
Subrounded	-Particles have nearly plane sides, but have no edges.
Rounded	-Particles have smoothly curved sides and well-rounded corners and edges.

Example soil description: Sandy FAT CLAY (CH), soft, wet, brown. (A-7)

Boring Log Descriptive Terminology

01/18/12

Key to Rock Symbols and Terms

Rock Type	Symbol	Rock Type	Symbol	Rock Type	Symbol
Argillite		Dolomite		Quartzite	
Basalt		Gneiss		Rhyolite	
Bedrock (other)		Granitic		Sandstone	
Breccia		Limestone		Schist	
Claystone		Siltstone		Shale	
		Conglomerate			

Order of Descriptors

- Rock Type
- Color
- Grain size (if applicable)
- Stratification/Foliation (as applicable)
- Field Hardness
- Other relevant notes

Criteria For Descriptors

Grain Size

Description	Characteristic
Coarse Grained	-Individual grains can be easily distinguished by eye
Fine Grained	-Individual grains can be distinguished with difficulty

Stratum Thickness

Thickly Bedded	3-10 ft (1-3 m)
Medium Bedded	1-3 ft (300 mm - 1 m)
Thinly Bedded	2-12 in (50-300 mm)
Very Thinly Bedded	< 2 in (50 mm)

Rock Field Hardness


Very Soft	-Can be carved with knife. Can be excavated readily with point of rock hammer. Can be scratched readily by fingernail.
Soft	-Can be grooved or gouged readily by knife or point of rock hammer. Can be excavated in fragments from chips to several inches in size by moderate blows of the point of a rock hammer.
Medium	-Can be grooved or gouged 0.05 in (2 mm) deep by firm pressure of knife or rock hammer point. Can be excavated in small chips to pieces about 1 in (25 mm) maximum size by hard blows of the point of a rock hammer.
Moderately hard	-Can be scratched with knife or pick. Gouges or grooves to 0.25 in (6 mm) can be excavated by hard blow of rock hammer. Hand specimen can be detached by moderate blows.
Hard	-Can be scratched with knife or pick only with difficulty. Hard hammer blows required to detach hand specimen.
Very Hard	-Cannot be scratched with knife or sharp rock hammer point. Breaking of hand specimens requires several hard blows of a rock hammer.

Notes:


UCS = Unconfined Compressive Strength obtained from laboratory testing at the given depth.

See Soil Boring Information Special Provision.

Miscellaneous Soil/Rock Symbols and Terms



Concrete



Asphalt



Water


Boulders and Cobbles


Coal


Fill


Millings


Topsoil

-Soil and Rock descriptions are based on visual observation, except where they have been modified to reflect results of laboratory tests as deemed appropriate.

Explanation of Text Fields in Boring Logs:

Material Description: Lithologic Description of soil or rock encountered.

Remarks: Comments on drilling, including method, bit type, and problems encountered.

Unless stated on logs as being surveyed by district survey, all locations are considered approximate.

General Notes

- Descriptions on these boring logs apply only at the specific boring, and at the time the borings were made. These logs are not warranted to be representative of subsurface conditions at other locations or times.
- Water level observations apply only at the specific boring, and at the time the borings were made. Due to the variability of groundwater measurements given the type of drilling used, and the stratification of the soil in the boring, these logs are not warranted to be representative of groundwater conditions at other locations or times.
- Other terms may be used as descriptors, as defined by the profession.

Operation Types: Auger, Casing Advancer, Core Barrel, Drive Casing

Sample Types: Split Spoon, Shelby, Bulk Sample, Grab Sample, Cone Penetrometer, Vane Shear, Special Samplers, Testpit

Example Rock Log

SANDSTONE, gray, fine grained, thickly bedded, hard field hardness.

Page 2 of 2

DOWL

LOG OF BORING

Boring 9884-6005-01

Project: MT-200 Bridges-Lewistown Area		**Rig:** BK-81 **Hammer:** Auto	**Boring Location Coordinates** N: 1023393.1 ft E: 2174958.2 ft	**Station:** 720 + 05 **Offset:** 38 ft L
Project Number: NHPB STWD (788)	**UPN:** 9884	**Boring Diameter:** 8 1/4-inch	**System:** MT S.P. (E) **Datum:** NAD83	**Ground Elevation:** 3268.8 ft
Date Started: 7/6/21	**Date Finished:** 7/6/21	**Drilling Fluid:** Water	**Location Source:** Surveyed	**Elevation Source:** Surveyed
Driller: P. Bray **Logger:** D. Barrick	**Notes:** On-road boring, EB lane of HWY 200 near structure 6005.		**PLS TRS-QQ:** 15N 24E 22 - BB **Abandonment:** Cuttings	

Depth (ft) / Elev. (ft)	Operation	Sample Type	Recovery (%)	RQD (%)	Blow Count	Lithology	Material Description	Depth (ft) / Elev. (ft)	MC (%)	LL	PL	-200 (%)	Qu (psi)	DD (pcf)	Remarks and Other Tests
			39		6 - 11 - 10		Asphalt, black.	0.6							Hollow stem augers.
							FILL, Well-Graded GRAVEL with sand (GW), medium dense, moist to dry, light gray to black, fine to coarse grained, rounded to subrounded, [A-1]. With boulders and cobbles.	3268.2 3.5 3265.3	2		NP	5			
5 3263.8			50		2 - 3 - 3		Fat CLAY with sand (CH), medium stiff, moist, very dark grayish green to gray, [A-7]. With some organic content.		31 31	50	22	75			Res: 357 Ohm-Cm pH: 6.1 S04: 3960 mg/kg
			89		2 - 2 - 3				30						
10 3258.8			100				Clayey SAND (SC), very loose to medium dense, moist to wet, gray, [A-7]. With some gravel. ▽	10.0 3258.8	27	41	19	43	6	88	
			100		1 - 1 - WH				30						
15 3253.8			100		2 - 2 - 2				28						
20 3248.8			100		4 - 3 - 8				25						
							SHALE, dark gray to gray, fine grained, very thinly bedded, very soft to soft field hardness.	22.0 3246.8							
25 3243.8			94		16 - 38 - 50/0.4ft										Res: 190 Ohm-Cm pH: 5.6 S04: 8850 mg/kg
30 3238.8			100		26 - 50/0.4ft				18						

Water Level Observations

▽ During Drilling: **11.5 ft** *(3257.3 ft)*

▽ End of Drilling:

▼ After Drilling:

Remarks:

(2) MDT LOG OF BORING - MDT_2018+.GDT - 11/9/23 11:30 - \\DOWL.COM\JPROJECTS\51\112391-01\50DESIGN\158\9884000_BRIDGES-LTOWN.GPJ

LOG OF BORING

Boring 9884-6005-01

Project: MT-200 Bridges-Lewistown Area		**Rig:** BK-81 **Hammer:** Auto	**Boring Location** N: 1023393.1 ft **Coordinates** E: 2174958.2 ft	**Station:** 720 + 05 **Offset:** 38 ft L
Project Number: NHPB STWD (788)	**UPN:** 9884	**Boring Diameter:** 8 1/4-inch	**System:** MT S.P. (E) **Datum:** NAD83	**Ground Elevation:** 3268.8 ft
Date Started: 7/6/21	**Date Finished:** 7/6/21	**Drilling Fluid:** Water	**Location Source:** Surveyed	**Elevation Source:** Surveyed
Driller: P. Bray **Logger:** D. Barrick	**Notes:** On-road boring, EB lane of HWY 200 near structure 6005.			**PLS TRS-QQ:** 15N 24E 22 - BB **Abandonment:** Cuttings

Depth (ft) Elev. (ft)	Operation	Sample Type	Recovery (%)	RQD (%)	Blow Count	Lithology	Material Description	Depth (ft) Elev. (ft)	MC (%)	LL	PL	-200 (%)	Qu (psi)	DD (pcf)	Remarks and Other Tests
35 3233.8			98	50			Shale, cont.								Switched to HQ3 coring with water.
40 3228.8			100	60					13				318	117	
45 3223.8			100	83			Sandy SHALE, very dark gray, fine grained, very thinly bedded, moderately hard to soft field hardness.	46.7 3222.1	14				1382	123	
50 3218.8			100	75			CLAYSTONE, light gray to black, fine grained, thinly bedded, very soft field hardness. Possibly bentonitic.	51.0 3217.8	14				966	121	
55 3213.8			100	93			Sandy SILTSTONE, dark gray, fine grained, very thinly bedded, soft field hardness. Sandy SHALE, dark gray to light gray, fine grained, very thinly bedded, soft to medium field hardness. With sandstone interbeds.	54.4 3214.4 56.0 3212.8	11				253	129	
60 3208.8							Boring Depth: 60.0 ft, *Elevation: 3208.8 ft*	60.0 3208.8							

Water Level Observations		
End of Drilling:	During Drilling: **11.5 ft** *(3257.3 ft)* After Drilling:	Remarks:

(2) MDT LOG OF BORING - MDT_2018+.GDT - 11/9/23 11:30 - \\DOWL.COM\JPROJECTS\51\12391-01\50DESIGN\158\9884000_BRIDGES-LTOWN.GPJ

DOWL

LOG OF BORING

Boring 9884-6005-02

Project: MT-200 Bridges-Lewistown Area		**Rig:** BK-81 **Hammer:** Auto	**Boring Location Coordinates** N: 1023357.8 ft E: 2175116.3 ft	**Station:** 721 + 63 **Offset:** 52 ft L
Project Number: NHPB STWD (788)	**UPN:** 9884	**Boring Diameter:** 8 1/4-inch	**System:** MT S.P. (E) **Datum:** NAD83	**Ground Elevation:** 3269.1 ft
Date Started: 7/7/21	**Date Finished:** 7/7/21	**Drilling Fluid:** Water	**Location Source:** Surveyed	**Elevation Source:** Surveyed
Driller: P. Bray **Logger:** D. Barrick	**Notes:** On-road boring, WB lane of HWY 200 near structure 6005.			**PLS TRS-QQ:** 15N 24E 22 - BB **Abandonment:** Cuttings

Depth (ft) / Elev. (ft)	Operation	Sample Type	Recovery (%)	RQD (%)	Blow Count	Lithology	Material Description	Depth (ft) / Elev. (ft)	MC (%)	LL	PL	-200 (%)	Qu (psi)	DD (pcf)	Remarks and Other Tests
							Asphalt, black.	0.5	2	24	14	17			Hollow stem augers.
			61		7 - 11 - 11		FILL, Clayey SAND with gravel (SC), medium dense, moist, brown to gray, fine to coarse grained, rounded to subrounded, [A-2]. With boulders.	3268.6	2						
5								4.3							
3264.1			39		2 - 2 - 2		Lean CLAY (CL), soft, moist, brown to grayish brown, [A-7].	3264.8	22						
			61		1 - 2 - 1				42						
10								10.0							
3259.1			92				Sandy Lean CLAY (CL), soft, moist to wet, multi-colored, fine grained, [A-6]. With interbeds of sand. ▽	3259.1	32	35	21	56	5	82	
			89		2 - 2 - 3										
15															
3254.1			100		WH - 2 - 1				33						
								18.0							
							Clayey SAND (SC), loose, wet to moist, multi-colored, fine grained, [A-2].	3251.1							
20															
3249.1			100						24	39	20	29	5	101	
								21.5							
							SHALE, gray to dark gray, fine grained, very thinly bedded, soft to very soft field hardness.	3247.6							
			67		4 - 3 - 5				25						
25															
3244.1			100		11 - 23 - 42				17						Res: 238 Ohm-Cm pH: 4.8 S04: 7290 mg/kg
30															
3239.1															Switched to HQ3 coring with water.
			88	85					14				107	119	

Water Level Observations		Remarks:
▽ End of Drilling:	▽ During Drilling: 11.9 ft (3257.2 ft) ▼ After Drilling:	

(2) MDT LOG OF BORING - MDT_2018+.GDT - 11/9/23 11:30 - \\DOWL.COM\JPROJECTS\51\12391-01\50DESIGN\158\9884000_BRIDGES-LTOWN.GPJ

LOG OF BORING

Boring 9884-6005-02

Project: MT-200 Bridges-Lewistown Area		**Rig:** BK-81 **Hammer:** Auto	**Boring Location** N: 1023357.8 ft **Coordinates** E: 2175116.3 ft	**Station:** 721 + 63 **Offset:** 52 ft L
Project Number: NHPB STWD (788)	**UPN:** 9884	**Boring Diameter:** 8 1/4-inch	**System:** MT S.P. (E) **Datum:** NAD83	**Ground Elevation:** 3269.1 ft
Date Started: 7/7/21	**Date Finished:** 7/7/21	**Drilling Fluid:** Water	**Location Source:** Surveyed	**Elevation Source:** Surveyed
Driller: P. Bray **Logger:** D. Barrick	**Notes:** On-road boring, WB lane of HWY 200 near structure 6005.			**PLS TRS-QQ:** 15N 24E 22 - BB **Abandonment:** Cuttings

Depth (ft) / Elev. (ft)	Operation	Sample Type	Recovery (%)	RQD (%)	Blow Count	Lithology	Material Description	Depth (ft) / Elev. (ft)	MC (%)	LL	PL	-200 (%)	Qu (psi)	DD (pcf)	Remarks and Other Tests
35 3234.1			100	45			Shale, cont.		14				170	121	
40 3229.1			100	67					13				169	123	
45 3224.1			100	28											
50 3219.1			93	87			Sandy SILTSTONE, dark gray to light gray, fine grained, very thinly bedded, soft to medium field hardness.	48.0 3221.1	13				1377	125	
55 3214.1			100	90			CLAYSTONE, very light gray to black flakes, fine grained, thinly bedded, very soft field hardness. Potentially bentonitic.	51.7 3217.4							
60 3209.1							Sandy SHALE, very dark gray, fine grained, very thinly bedded, soft to medium field hardness.	54.4 3214.7	12				178	126	
							Boring Depth: 60.0 ft, *Elevation: 3209.1 ft*	60.0 3209.1							

Water Level Observations

During Drilling: **11.9 ft** *(3257.2 ft)*

End of Drilling:

After Drilling:

Remarks:

(2) MDT LOG OF BORING - MDT_2018+.GDT - 11/9/23 11:30 - \\DOWL.COM\JPROJECTS\51\12391-01\50DESIGN\158\9884000_BRIDGES-LTOWN.GPJ

LOG OF BORING

Boring 9884-6005-03

Project: MT-200 Bridges-Lewistown Area		**Rig:** BK-81 **Hammer:** Auto	**Boring Location** N: 1023428.1 ft **Coordinates** E: 2174536.1 ft	**Station:** 715 + 87 **Offset:** 9 ft L
Project Number: NHPB STWD (788)	**UPN:** 9884	**Boring Diameter:** 8 1/4-inch	**System:** MT S.P. (E) **Datum:** NAD83	**Ground Elevation:** 3269.5 ft
Date Started: 7/8/21	**Date Finished:** 7/8/21	**Drilling Fluid:** None	**Location Source:** Surveyed	**Elevation Source:** Surveyed
Driller: P. Bray **Logger:** D. Barrick	**Notes:** On-road boring, west of structure 6005, WB lane HWY 200.		**PLS TRS-QQ:** 15N 24E 22 - BB **Abandonment:** Cuttings	

Depth (ft) / Elev. (ft)	Operation	Sample Type	Recovery (%)	RQD (%)	Blow Count	Lithology	Material Description	Depth (ft) / Elev. (ft)	MC (%)	LL	PL	-200 (%)	Qu (psi)	DD (pcf)	Remarks and Other Tests
							Asphalt, black.	0.6							Hollow stem augers.
			78		18 - 13 - 13		BASE COURSE, Silty, Clayey GRAVEL with sand (GC-GM), medium dense, dry to moist, light gray to light brown, fine to coarse grained, subangular to rounded, [A-2].	3268.9	5 3	23	16	12			
			44		8 - 7 - 4			3.5	4						
5			100				Clayey SAND (SC), medium dense, moist, black to brown, [A-7].	3266.0	17	47	19	42			MDD: 109.5 pcf OMC: 16.1% CBR: 4.2
3264.5			83		4 - 5 - 5				22						
			83		2 - 1 - 2				30						
10							Lean CLAY with sand (CL), soft, moist, brown to grayish brown, [A-7].	9.5							
3259.5			100		2 - 2 - 2			3260.0	26						
							Boring Depth: 11.5 ft, *Elevation: 3258.0 ft*	11.5 3258.0							

Water Level Observations		
End of Drilling:	During Drilling: **Not Encountered**	Remarks:
	After Drilling:	

(2) MDT LOG OF BORING - MDT_2018+.GDT - 11/9/23 11:30 - \\DOWL.COM\JPROJECTS\51\112391-01\50DESIGN\158\9884000_BRIDGES-LTOWN.GPJ

DOWL

LOG OF BORING

Boring 9884-6005-04

Project: MT-200 Bridges-Lewistown Area		**Rig:** BK-81 **Hammer:** Auto	**Boring Location Coordinates** N: 1023220.3 ft E: 2175347.3 ft	**Station:** 724 + 25 **Offset:** 22 ft L
Project Number: NHPB STWD (788)	**UPN:** 9884	**Boring Diameter:** 8 1/4-inch	**System:** MT S.P. (E) **Datum:** NAD83	**Ground Elevation:** 3272.1 ft
Date Started: 7/6/21	**Date Finished:** 7/6/21	**Drilling Fluid:** None	**Location Source:** Surveyed	**Elevation Source:** Surveyed
Driller: P. Bray **Logger:** D. Barrick	**Notes:** On-road boring, east of structure 6005, EB lane HWY 200.		**PLS TRS-QQ:** 15N 24E 22 - BB **Abandonment:** Cuttings	

Depth (ft) / Elev. (ft)	Operation	Sample Type	Recovery (%)	RQD (%)	Blow Count	Lithology	Material Description	Depth (ft) / Elev. (ft)	MC (%)	LL	PL	-200 (%)	Qu (psi)	DD (pcf)	Remarks and Other Tests
							Asphalt, black.	0.5 *3271.6*	4						Hollow stem augers.
			67		9 - 14 - 14		BASE COURSE, Well-Graded SAND with silt and gravel (SW-SM), Millings, dry to moist, black to gray, fine to coarse grained, subangular to rounded, [A-1].	1.2 *3270.9*	4 5		NP NP	5 12			
			72 100		7 - 2 - 3		FILL, Poorly-Graded GRAVEL with silt and sand (GP-GM), loose, dry to moist, brown to multi-colored, fine to coarse grained, subrounded to rounded, [A-1].	3.1 *3269.0*	15 22	47	20	67			
5 *3267.1*			44		2 - 2 - 1		Sandy Lean CLAY (CL), soft to stiff, moist, dark gray to brown, fine grained, [A-7].		22						
			100		3 - 4 - 7				26						
10 *3262.1*			67		3 - 4 - 5				24						
							Boring Depth: 11.5 ft, *Elevation: 3260.6 ft*	11.5 *3260.6*							

Water Level Observations		
End of Drilling:	During Drilling: Not Encountered After Drilling:	Remarks:

(2) MDT LOG OF BORING - MDT_2018+.GDT - 11/9/23 11:30 - \\DOWL.COM\JPROJECTS\51\112391-01\50DESIGN\158\9884000_BRIDGES-LTOWN.GPJ

DOWL

LOG OF BORING

Boring 9884-6005-05

Project: MT-200 Bridges-Lewistown Area		**Rig:** CME 45 **Hammer:** Safety	**Boring Location** N: 1023210 ft **Coordinates** E: 2175246.8 ft	**Station:** 723 + 40 **Offset:** 33 ft R
Project Number: NHPB STWD (788)	**UPN:** 9884	**Boring Diameter:** 6 in	**System:** MT S.P. (E) **Datum:** NAD83	**Ground Elevation:** 3264.1 ft
Date Started: 3/14/23	**Date Finished:** 3/14/23	**Drilling Fluid:** None	**Location Source:** Surveyed	**Elevation Source:** Surveyed
Driller: B. Hardy **Logger:** D. Duncan	**Notes:** Off-road boring to evaluate foundation and settlement potential, south side of HWY 200 near structure 6005.			**PLS TRS-QQ:** 15N 22E 22 - B **Abandonment:** Cuttings

Depth (ft) / Elev. (ft)	Operation	Sample Type	Recovery (%)	RQD (%)	Blow Count	Lithology	Material Description	Depth (ft) / Elev. (ft)	MC (%)	LL	PL	-200 (%)	Qu (psi)	DD (pcf)	Remarks and Other Tests
							TOPSOIL.	0.5 3263.6							Casing Advancer with Air.
							Sandy Lean CLAY (CL), medium stiff to soft, moist to wet, brown, fine grained. with leachings down to 4 feet							
			78		4 - 3 - 2				16						
5 3259.1			67		2 - 1 - 3				24	34	19	48			
			100						27	32	17	69			Consol.
10 3254.1			100		1 - 1 - 2				30						
							Clayey SAND with gravel (SC), loose, wet, brown to multi-colored, coarse grained, subangular.	15.5 3248.6	25	38	22	36			
15 3249.1			67		3 - 3 - 4										
							SHALE, gray to dark brown, very thickly bedded, moderately hard field hardness.	17.5 3246.6							
20 3244.1			100		8 - 18 - 37										
							Boring Depth: 21.5 ft, *Elevation: 3242.6 ft*	21.5 3242.6							

Water Level Observations		
End of Drilling:	During Drilling: 9.0 ft *(3255.1 ft)* After Drilling:	Remarks:

(2) MDT LOG OF BORING - MDT_2018+.GDT - 11/9/23 11:30 - \\DOWL.COM\JPROJECTS\51\12391-01\50DESIGN\158\9884000_BRIDGES-LTOWN.GPJ

STANDARD PROVISIONS INDEX

FEDERAL AID PROJECTS **CONTAINS**

Federal Wage Rates (Rev. 1-05-2024)..... 6 Pages

Requirements & Acknowledgement for Working on Railroad R/W ..... 1 Page

Required Contract Provisions Federal-Aid Const. Contracts (FORM FHWA-1273) [Rev.10-23-2023] ..... 14 Pages

Supplemental Revisions for Required Contract Provisions Federal-Aid Const. Contracts (FORM FHWA-1273) [Added 2-4-2016] ..... 1 Page

EEO Affirmative Action Req. on Federal-Aid Construction ..... 1 Page

General Decision Number: MT20240079 01/05/2024

Superseded General Decision Number: MT20230079

State: Montana

Construction Type: Highway

Counties: Montana Statewide.

HIGHWAY CONSTRUCTION PROJECTS

Note: Contracts subject to the Davis-Bacon Act are generally required to pay at least the applicable minimum wage rate required under Executive Order 14026 or Executive Order 13658. Please note that these Executive Orders apply to covered contracts entered into by the federal government that are subject to the Davis-Bacon Act itself, but do not apply to contracts subject only to the Davis-Bacon Related Acts, including those set forth at 29 CFR 5.1(a)(1).

If the contract is entered into on or after January 30,2022, or the contract is renewed or extended (e.g., an option is exercised) on or option is exercised) on or after January 30, 2022.	Executive Order 14026 generally applies to the contract. The contractor must pay all covered workers at least $17.20 per hour (or the applicable wage determination, if it is higher) for all hours spent performing on the contract in 2024.
If the contract was awarded on or between January 1, 2015 and January 29, 2022, and the contract is not renewed or extended on or after January 30, 2022.	Executive Order 13658 generally applies to the contract. The contractor must pay all covered workers at least $12.90 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours performing on that contract in 2024.

The applicable Executive Order minimum wage rate will be adjusted annually. If this contract is covered by one of the Executive Orders and a classification considered necessary for performance of work on the contract does not appear on this wage determination, the contractor must still submit a conformance request.

Additional information on contractor requirements and worker protections under the Executive Orders is available at http://www.dol.gov/whd/govcontracts .

Modification Number	Publication Date
0	01/05/2024

SUMT2023-001 04/01/2022

	Rates	Fringes
CARPENTER		
Carpenter/Piledriverman	$ 36.05	14.23
Millwright	$ 40.87	14.70
CEMENT MASON/CONCRETE FINISHER	$ 33.41	16.51

DIVER

Diver Tender	$ 45.30	18.38
Diving	$ 92.66	18.38
Stand-By	$ 46.33	18.38

The tender shall receive 2 hours at the straight time pay rate per shift for dressing and/or undressing when work is done under hyperbaric conditions.

Depth Pay (Surface Diving):
0-20 ft.: Free zone
>20-100 ft.: $2.00 per ft.
>100-150 ft.: $3.00 per ft.
>150-220 ft.: $4 00 per ft.
>220 ft.: $5.00 per ft.

Diving in Enclosures (Diver Only):
0-25 ft.: Free zone
>25-300 ft.: $1.00 per ft.

ELECTRICIAN (LINE CONSTRUCTION)

Equipment Operator	$ 38.38	18.60
Groundman.	$ 29.96	17.64
Lineman	$ 50.11	19.88

ELECTRICIAN

All Areas	$ 39.08	20.00

IRONWORKER	$ 30.43	25.22

LABORER

Group 1	$ 27.71	12.36
Group 2	$ 30.87	12.36
Group 3	$ 31.10	12.36
Group 4	$ 32.12	12.36

GROUP 1: Flag Person

GROUP 2: All General Labor work; Burning Bar; Bucket Man; Carpenter Tender; Caisson Worker; Cement Mason Tender; Cement Handler (dry); Chuck Tender; Choker Setter; Concrete Worker; Curb Machine-Lay Down; Crusher and Batch Plant Worker; Fence Erector; Form Setter; Form Stripper; Heater Tender; Landscaper; Pipe Wrapper; Pot Tender; Powderman Tender; Rail and Truck Loaders and Unloaders; Riprapper; Sealants for Concrete and other materials; Sign Erection, Guard Rail and Jersey Rail; Stake Jumper; Spike Driver; Signalman; Tail Hoseman; Tool Checker and Houseman; Traffic Control Worker

GROUP 3: Concrete Vibrator; Dumpman (Grademan); Equipment Handler; Geotextile and Liners; High-Pressure Nozzleman; Jackhammer (Pavement Breaker); Laser Equipment; Non-riding Rollers; Pipelayer; Posthole Digger (power); Power Driven Wheelbarrow; Rigger; Sandblaster; Sod-Cutter-power; Tampers

GROUP 4: Asphalt Raker; Cutting Torch; Grade Setter; High-Scaler; Power Saws (Faller & Concrete); Powderman ($1.00 per hour above Group 4 rate); Rock & Core Drill; Track or Truck Mounted Wagon Drill; Welder including Air Arc

PAINTER $ 36.00 12.84

Pavement Marking/Milling and related work. Includes operating marking and all other equipment and all work involved in application of pavement markings including epoxies, paints, tape, buttons, thermo-plastics, and any other products applied for traffic marking purposes and for directing and regulating traffic and cutting rumble strips.

POWER EQUIPMENT OPERATOR:

Group 1	$ 32.47	12.77
Group 2	$ 34.55	12.77
Group 3	$ 35.70	12.77
Group 4	$ 36.67	12.77
Group 5	$ 38.05	12.77
Group 6	$ 39.27	12.77
Group 7	$ 41.95	12.77

GROUP 1: Air Compressor; Auto Fine Graders; Belt Finishing Machine; Boring Machine (small); Cement Silo; Crane, A-Frame Truck Crane; Crusher Conveyor; DW-10, 15, and 20 Tractor Roller; Farm Tractor; Forklift; Form Grader; Front End Loader Under 1 CU Yard; Heavy Duty Drills; Herman Nelson Heater; Mulching Machine; Oiler, All Except Cranes & Shovels; Pumpman

GROUP 2: Air Doctor; Backhoe/Excavator/Shovel to and including 3 CU Yard; Bit Grinder; Bituminous Paving Travel Plant; Boring Machine Large; Broom, Self-Propelled; Concrete Travel Batcher; Concrete Float & Spreader; Concrete Bucket Dispatcher, Concrete Finish Machine; Concrete Conveyor; Distributor; Dozer; Rubber-Tired, Push & Side Boom; Elevating Grader/Gradall; Field Equipment Serviceman; Front End Loader 1 CU Yard to including 5 CU Yard; Grade Setter; Heavy Duty Drills, All Types; Hoist/Tugger, All; Hydralift & Similar; Industrial Locomotive; Motor Patrol, Except Finish; Mountain Skidder; Oiler - Cranes & Shovels; Pavement Breaker, EMSCO; Power Saw, Self-Propelled; Pugmill; Pumpcrete/Grout Machine; Punch Truck; Roller, Other Than Asphalt; Roller, Sheepsfoot, Self-Propelled; Roller, 25 Tons and Over; Ross Carrier; Rotomill Under 6 Ft; Trenching Machine; Washing/Screening Plant

GROUP 3: Asphalt Paving Machine; Asphalt Screed; Backhoe/Excavator/Shovel Over 3 CU Yard; Cableway Highline; Concrete Batch Plant; Concrete Curing Machine; Concrete Pump; Cranes; Creter; Cranes, Electric Overhead; Cranes 24 Tons and Under; Curb Machine/Slip Form Paver; Finish Dozer; Front End Loader Over 5 CU Yard; Mechanic/Welder; Pioneer Dozer; Roller Asphalt (Breakdown & Finish); Rotomill, Over 6 FT; Scraper, Single, Twin or Pulling Belly Dump; Yo-Yo Cat

GROUP 4: Asphalt/Hot Plant Operator, Cranes, 25 Tons to 44 Tons; Crusher Operator; Finish Motor Patrol; Finish Scraper

GROUP 5: Cranes, 45 Tons To Including 74 Tons

GROUP 6: Cranes, 75 Tons To Including 149 Tons; Crane, Whirley (All)

GROUP 7: Cranes,150 Tons To Including 250 Tons (Add $ 1.00 For Every 100 Tons Over 250 Tons; Crane, Tower (All)

TRUCK DRIVER

Group 1	$ 28.21	12.57
Group 2	$ 35.74	12.57

GROUP 1: Pilot Car

GROUP 2: Combination Truck and Concrete Mixer and Transit Mixer; Dry Batch Trucks; Distributor Driver; Dumpman; Dump Trucks and Similar Equipment; Dumpster; Flat Trucks; Lumber Carriers; Lowboys; Pickup; Powder Truck Driver; Power Boom; Serviceman; Service Truck/Fuel Truck/ Tireperson; Truck Mechanic; Trucks With Power Equipment; Warehouseman, Partsman, Cardex and Warehouse Expeditor; Water Trucks

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

==========

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year. Employees must be permitted to use paid sick leave for their own illness, injury or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at https://www.dol.gov/agencies/whd/government-contracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical order of ""identifiers"" that indicate whether the particular rate is a union rate (current union negotiated rate for local), a survey rate (weighted average rate) or a union average rate (weighted union average rate).

Union Rate Identifiers

A four-letter classification abbreviation identifier enclosed in dotted lines beginning with characters other than "SU" or "UAVG" denotes that the union classification and rate were prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2014. PLUM is an abbreviation identifier of the union which prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. 07/01/2014 is the effective date of the most current negotiated rate, which in this example is July 1, 2014.

Union prevailing wage rates are updated to reflect all rate changes in the collective bargaining agreement (CBA) governing this classification and rate.

Survey Rate Identifiers

Classifications listed under the ""SU"" identifier indicate that no one rate prevailed for this classification in the survey and the published rate is derived by computing a weighted average

rate based on all the rates reported in the survey for that classification. As this weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SULA2012-007 5/13/2014. SU indicates the rates are survey rates based on a weighted average calculation of rates and are not majority rates. LA indicates the State of Louisiana. 2012 is the year of survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. 5/13/2014 indicates the survey completion date for the classifications and rates under that identifier.

Survey wage rates are not updated and remain in effect until a new survey is conducted.

Union Average Rate Identifiers

Classification(s) listed under the UAVG identifier indicate that no single majority rate prevailed for those classifications; however, 100% of the data reported for the classifications was union data. EXAMPLE: UAVG-OH-0010 08/29/2014. UAVG indicates that the rate is a weighted union average rate. OH indicates the state. The next number, 0010 in the example, is an internal number used in producing the wage determination. 08/29/2014 indicates the survey completion date for the classifications and rates under that identifier.

A UAVG rate will be updated once a year, usually in January of each year, to reflect a weighted average of the current negotiated/CBA rate of the union locals from which the rate is based.

WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can be:

* an existing published wage determination
* a survey underlying a wage determination
* a Wage and Hour Division letter setting forth a position on a wage determination matter
* a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour National Office because National Office has responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

==========

END OF GENERAL DECISION

"CONTRACTOR REQUIREMENTS AND ACKNOWLEDGMENT FOR WORKING ON RAILROAD RIGHT-OF-WAY"

This document must be dated and signed by the Contractor and submitted to the State before occupying or working on Railroad right-of-way.

1) No change, which has a direct effect on the Railroad, will be made to construction plans without submitting revised plans and receiving approval from the Railroad. Work covered by the plans, that requires flagging, will be covered by the Railroad/Highway Agreement. For work that is a result of the contractor's discretion, flagging protection will be required when equipment crosses or is working within 25 feet (7.62 meters) of center of any live track. When deemed necessary by local Railroad officers, a flagman may be required at all times while working on Railroad right-of-way in high density rail traffic area.

2) Crossing of any Railroad tracks must be done at approved locations and must be full depth timber, rubber, etc. Any equipment with steel wheels, lugs or tracks must not cross steel rails without the use of rubber tires or other approved protection. This shall apply specifically to, but not be limited to, access for Contractor furnished gravel, borrow or waste sites. The Contractor will be required to obtain a permit from the Railroad, and comply with any provisions thereof, before using any private Railroad crossings. All track crossing locations must be covered by a Private Roadway and Crossing Agreement. This does not apply to any public crossing.

3) Costs of flagging or planking protection of the tracks, which are a direct result of the planned construction, will be paid for by the State. Costs of flagging, planking for protection of the tracks, installation of new crossings or other work caused by the Contractor's discretion, will be paid by the Contractor.

4) When work to be performed by the Contractor is not covered in the Railroad/Highway agreement, the Contractor must furnish a plan to the Railroad for approval showing details as to how any work that may affect the Railroad will be accomplished.

5) Storing of construction materials or any other material, including dirt, sand, etc., within the Railroad right-of-way, will not be allowed unless covered by an easement, construction permit, or Contractor's permit/lease.

6) Construction within 25 feet (7.62 meters) of the center of any track not covered by the Railroad/Highway agreement will require plan approval and authorization by the Railroad Superintendent Maintenance and Engineering. This includes, but is not limited to, any excavation, slope work and driving of sheet piling.

7) No vehicles, equipment or machines shall be parked or stored unattended within 25 feet (7.62 meters) of any track, on railroad right-of-way, without specific written approval of the Railroad.

8) When any work is to be performed on Railroad property by the Contractor that is not shown in the construction plans, the Contractor must submit a detailed plan of the work to the Railroad for their approval.

CONTRACTOR'S ACKNOWLEDGMENT:

_____
Company

By: _____
Name

_____
Title

_____
Date

WORK SITE LOCATION:

_____
Town

_____
State

_____
Project #

Rev. 01/01/04

FHWA-1273 – Revised October 23, 2023

REQUIRED CONTRACT PROVISIONS
FEDERAL-AID CONSTRUCTION CONTRACTS

I. General
II. Nondiscrimination
III. Non-segregated Facilities
IV. Davis-Bacon and Related Act Provisions
V. Contract Work Hours and Safety Standards Act Provisions
VI. Subletting or Assigning the Contract
VII. Safety: Accident Prevention
VIII. False Statements Concerning Highway Projects
IX. Implementation of Clean Air Act and Federal Water Pollution Control Act
X. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion
XI. Certification Regarding Use of Contract Funds for Lobbying
XII. Use of United States-Flag Vessels:

ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only)

I. GENERAL

1. Form FHWA-1273 must be physically incorporated in each construction contract funded under title 23, United States Code, as required in 23 CFR 633.102(b) (excluding emergency contracts solely intended for debris removal). The contractor (or subcontractor) must insert this form in each subcontract and further require its inclusion in all lower tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services). 23 CFR 633.102(e).

The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider. 23 CFR 633.102(e).

Form FHWA-1273 must be included in all Federal-aid design-build contracts, in all subcontracts and in lower tier subcontracts (excluding subcontracts for design services, purchase orders, rental agreements and other agreements for supplies or services) in accordance with 23 CFR 633.102. The design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in solicitation-for-bids or request-for-proposals documents, however, the Form FHWA-1273 must be physically incorporated (not referenced) in all contracts, subcontracts and lower-tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services related to a construction contract). 23 CFR 633.102(b).

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract. 23 CFR 633.102(d).

3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.

4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. 23 U.S.C. 114(b). The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors. 23 U.S.C. 101(a).

II. NONDISCRIMINATION (23 CFR 230.107(a); 23 CFR Part 230, Subpart A, Appendix A; EO 11246)

The provisions of this section related to 23 CFR Part 230, Subpart A, Appendix A are applicable to all Federal-aid construction contracts and to all related construction subcontracts of $10,000 or more. The provisions of 23 CFR Part 230 are not applicable to material supply, engineering, or architectural service contracts.

In addition, the contractor and all subcontractors must comply with the following policies: Executive Order 11246, 41 CFR Part 60, 29 CFR Parts 1625-1627, 23 U.S.C. 140, Section 504 of the Rehabilitation Act of 1973, as amended (29 U.S.C. 794), Title VI of the Civil Rights Act of 1964, as amended (42 U.S.C. 2000d et seq.), and related regulations including 49 CFR Parts 21, 26, and 27; and 23 CFR Parts 200, 230, and 633.

The contractor and all subcontractors must comply with: the requirements of the Equal Opportunity Clause in 41 CFR 60-1.4(b) and, for all construction contracts exceeding $10,000, the Standard Federal Equal Employment Opportunity Construction Contract Specifications in 41 CFR 60-4.3.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with Executive Order 11246 and the policies of the Secretary of Labor including 41 CFR Part 60, and 29 CFR Parts 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with 23 U.S.C. 140, Section 504 of the Rehabilitation Act of 1973, as amended (29 U.S.C. 794), and Title VI of the Civil Rights Act of 1964, as amended (42 U.S.C. 2000d et seq.), and related regulations including 49 CFR Parts 21, 26, and 27; and 23 CFR Parts 200, 230, and 633.

The following provision is adopted from 23 CFR Part 230, Subpart A, Appendix A, with appropriate revisions to conform to the U.S. Department of Labor (US DOL) and FHWA requirements.

1. Equal Employment Opportunity: Equal Employment Opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (*see* 28 CFR Part 35, 29 CFR Part 1630, 29 CFR Parts 1625-1627, 41 CFR Part 60 and 49 CFR Part 27) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140, shall constitute the EEO and specific affirmative action standards for the contractor's project activities under this contract. The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR Part 35 and 29 CFR Part 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

a. The contractor will work with the contracting agency and the Federal Government to ensure that it has made every good faith effort to provide equal opportunity with respect to all of its terms and conditions of employment and in their review of activities under the contract. 23 CFR 230.409 (g)(4) & (5).

b. The contractor will accept as its operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, sexual orientation, gender identity, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, pre-apprenticeship, and/or on-the-job training."

2. EEO Officer: The contractor will designate and make known to the contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active EEO program and who must be assigned adequate authority and responsibility to do so.

3. Dissemination of Policy: All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action or are substantially involved in such action, will be made fully cognizant of and will implement the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer or other knowledgeable company official.

b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.

c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minorities and women.

d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.

e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4. Recruitment: When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minorities and women in the area from which the project work force would normally be derived.

a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minorities and women. To meet this requirement, the contractor will identify sources of potential minority group employees and establish with such identified sources procedures whereby minority and women applicants may be referred to the contractor for employment consideration.

b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, the contractor is expected to observe the provisions of that agreement to the extent that the system meets the contractor's compliance with EEO contract provisions. Where implementation of such an agreement has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Federal nondiscrimination provisions.

c. The contractor will encourage its present employees to refer minorities and women as applicants for employment. Information and procedures with regard to referring such applicants will be discussed with employees.

5. Personnel Actions: Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, sexual orientation, gender identity, national origin, age or disability. The following procedures shall be followed:

a. The contractor will conduct periodic inspections of project sites to ensure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.

b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.

c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.

d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with its obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action

within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of their avenues of appeal.

6. Training and Promotion:

a. The contractor will assist in locating, qualifying, and increasing the skills of minorities and women who are applicants for employment or current employees. Such efforts should be aimed at developing full journey level status employees in the type of trade or job classification involved.

b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs (i.e., apprenticeship and on-the-job training programs for the geographical area of contract performance). In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision. The contracting agency may reserve training positions for persons who receive welfare assistance in accordance with 23 U.S.C. 140(a).

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d. The contractor will periodically review the training and promotion potential of employees who are minorities and women and will encourage eligible employees to apply for such training and promotion.

7. Unions: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use good faith efforts to obtain the cooperation of such unions to increase opportunities for minorities and women. 23 CFR 230.409. Actions by the contractor, either directly or through a contractor's association acting as agent, will include the procedures set forth below:

a. The contractor will use good faith efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minorities and women for membership in the unions and increasing the skills of minorities and women so that they may qualify for higher paying employment.

b. The contractor will use good faith efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, sexual orientation, gender identity, national origin, age, or disability.

c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the contracting agency and shall set forth what efforts have been made to obtain such information.

d. In the event the union is unable to provide the contractor with a reasonable flow of referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, sexual orientation, gender identity, national origin, age, or disability; making full efforts to obtain qualified and/or qualifiable minorities and women. The failure of a union to provide sufficient referrals (even though it is obligated to provide exclusive referrals under the terms of a collective bargaining agreement) does not relieve the contractor from the requirements of this paragraph. In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the contracting agency.

8. Reasonable Accommodation for Applicants / Employees with Disabilities: The contractor must be familiar with the requirements for and comply with the Americans with Disabilities Act and all rules and regulations established thereunder. Employers must provide reasonable accommodation in all employment activities unless to do so would cause an undue hardship.

9. Selection of Subcontractors, Procurement of Materials and Leasing of Equipment: The contractor shall not discriminate on the grounds of race, color, religion, sex, sexual orientation, gender identity, national origin, age, or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment. The contractor shall take all necessary and reasonable steps to ensure nondiscrimination in the administration of this contract.

a. The contractor shall notify all potential subcontractors, suppliers, and lessors of their EEO obligations under this contract.

b. The contractor will use good faith efforts to ensure subcontractor compliance with their EEO obligations.

10. Assurances Required:

a. The requirements of 49 CFR Part 26 and the State DOT's FHWA-approved Disadvantaged Business Enterprise (DBE) program are incorporated by reference.

b. The contractor, subrecipient or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the recipient deems appropriate, which may include, but is not limited to:
(1) Withholding monthly progress payments;
(2) Assessing sanctions;
(3) Liquidated damages; and/or
(4) Disqualifying the contractor from future bidding as non-responsible.

c. The Title VI and nondiscrimination provisions of U.S. DOT Order 1050.2A at Appendixes A and E are incorporated by reference. 49 CFR Part 21.

11. Records and Reports: The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following the date of the final payment to the contractor for all contract work and shall be available at reasonable times and places for inspection by authorized representatives of the contracting agency and the FHWA.

a. The records kept by the contractor shall document the following:

(1) The number and work hours of minority and non-minority group members and women employed in each work classification on the project;

(2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women; and

(3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minorities and women.

b. The contractors and subcontractors will submit an annual report to the contracting agency each July for the duration of the project indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form FHWA-1391. The staffing data should represent the project work force on board in all or any part of the last payroll period preceding the end of July. If on-the-job training is being required by special provision, the contractor will be required to collect and report training data. The employment data should reflect the work force on board during all or any part of the last payroll period preceding the end of July.

III. NONSEGREGATED FACILITIES

This provision is applicable to all Federal-aid construction contracts and to all related construction subcontracts of more than $10,000. 41 CFR 60-1.5.

As prescribed by 41 CFR 60-1.8, the contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color, religion, sex, sexual orientation, gender identity, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensure that its employees are not assigned to perform their services at any location under the contractor's control where the facilities are segregated. The term "facilities" includes waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, washrooms, locker rooms and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees. The contractor shall provide separate or single-user restrooms and necessary dressing or sleeping areas to assure privacy between sexes.

IV. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding $2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size), in accordance with 29 CFR 5.5. The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. 23 U.S.C. 113. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. 23 U.S.C. 101. Where applicable law requires that projects be treated as a project on a Federal-aid highway, the provisions of this subpart will apply regardless of the location of the project. Examples include: Surface Transportation Block Grant Program projects funded under 23 U.S.C. 133 [excluding recreational trails projects], the Nationally Significant Freight and Highway Projects funded under 23 U.S.C. 117, and National Highway Freight Program projects funded under 23 U.S.C. 167.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 “Contract provisions and related matters” with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. Minimum wages (29 CFR 5.5)

a. *Wage rates and fringe benefits.* All laborers and mechanics employed or working upon the site of the work (or otherwise working in construction or development of the project under a development statute), will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of basic hourly wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics. As provided in paragraphs (d) and (e) of 29 CFR 5.5, the appropriate wage determinations are effective by operation of law even if they have not been attached to the contract. Contributions made or costs reasonably anticipated for bona fide fringe benefits under the Davis-Bacon Act (40 U.S.C. 3141(2)(B)) on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph 1.e. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics must be paid the appropriate wage rate and fringe benefits on the wage determination for the classification(s) of work actually performed, without regard to skill, except as provided in paragraph 4. of this section. Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: *Provided,* That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classifications and wage rates conformed under paragraph 1.c. of this section) and the Davis-Bacon poster (WH–1321) must be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

b. *Frequently recurring classifications.* (1) In addition to wage and fringe benefit rates that have been determined to be prevailing under the procedures set forth in 29 CFR part 1, a wage determination may contain, pursuant to § 1.3(f), wage and fringe benefit rates for classifications of laborers and mechanics for which conformance requests are regularly submitted pursuant to paragraph 1.c. of this section, provided that:

(i) The work performed by the classification is not performed by a classification in the wage determination for which a prevailing wage rate has been determined;

(ii) The classification is used in the area by the construction industry; and

(iii) The wage rate for the classification bears a reasonable relationship to the prevailing wage rates contained in the wage determination.

(2) The Administrator will establish wage rates for such classifications in accordance with paragraph 1.c.(1)(iii) of this section. Work performed in such a classification must be paid at no less than the wage and fringe benefit rate listed on the wage determination for such classification.

c. *Conformance.* (1) The contracting officer must require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract be classified in conformance with the wage determination. Conformance of an additional classification and wage rate and fringe benefits is appropriate only when the following criteria have been met:

(i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and

(ii) The classification is used in the area by the construction industry; and

(iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) The conformance process may not be used to split, subdivide, or otherwise avoid application of classifications listed in the wage determination.

(3) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken will be sent by the contracting officer by email to *DBAconformance@dol.gov*. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30–day period that additional time is necessary.

(4) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer will, by email to *DBAconformance@dol.gov*, refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Administrator for determination. The Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30–day period that additional time is necessary.

(5) The contracting officer must promptly notify the contractor of the action taken by the Wage and Hour Division under paragraphs 1.c.(3) and (4) of this section. The contractor must furnish a written copy of such determination to each affected worker or it must be posted as a part of the wage determination. The wage rate (including fringe benefits where appropriate) determined pursuant to paragraph 1.c.(3) or (4) of this section must be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

d. *Fringe benefits not expressed as an hourly rate.* Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor may either pay the benefit as stated in the wage determination or may pay another bona fide fringe benefit or an hourly cash equivalent thereof.

e. *Unfunded plans.* If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, *Provided,* That the Secretary of Labor has found, upon the written request of the contractor, in accordance with the criteria set forth in § 5.28, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

f. *Interest.* In the event of a failure to pay all or part of the wages required by the contract, the contractor will be required to pay interest on any underpayment of wages.

2. Withholding (29 CFR 5.5)

a. *Withholding requirements.* The contracting agency may, upon its own action, or must, upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor so much of the accrued payments or advances as may be considered necessary to satisfy the liabilities of the prime contractor or any subcontractor for the full amount of wages and monetary relief, including interest, required by the clauses set forth in this section for violations of this contract, or to satisfy any such liabilities required by any other Federal contract, or federally assisted contract subject to Davis-Bacon labor standards, that is held by the same prime contractor (as defined in § 5.2). The necessary funds may be withheld from the contractor under this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract that is subject to Davis-Bacon labor standards requirements and is held by the same prime contractor, regardless of whether the other contract was awarded or assisted by the same agency, and such funds may be used to satisfy the contractor liability for which the funds were withheld. In the event of a contractor's failure to pay any laborer or mechanic, including any apprentice or helper working on the site of the work all or part of the wages required by the contract, or upon the contractor's failure to submit the required records as discussed in paragraph 3.d. of this section, the contracting agency may on its own initiative and after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

b. *Priority to withheld funds.* The Department has priority to funds withheld or to be withheld in accordance with paragraph

2.a. of this section or Section V, paragraph 3.a., or both, over claims to those funds by:

(1) A contractor's surety(ies), including without limitation performance bond sureties and payment bond sureties;

(2) A contracting agency for its reprocurement costs;

(3) A trustee(s) (either a court-appointed trustee or a U.S. trustee, or both) in bankruptcy of a contractor, or a contractor's bankruptcy estate;

(4) A contractor's assignee(s);

(5) A contractor's successor(s); or

(6) A claim asserted under the Prompt Payment Act, 31 U.S.C. 3901–3907.

3. Records and certified payrolls (29 CFR 5.5)

a. *Basic record requirements* (1) *Length of record retention.* All regular payrolls and other basic records must be maintained by the contractor and any subcontractor during the course of the work and preserved for all laborers and mechanics working at the site of the work (or otherwise working in construction or development of the project under a development statute) for a period of at least 3 years after all the work on the prime contract is completed.

(2) *Information required.* Such records must contain the name; Social Security number; last known address, telephone number, and email address of each such worker; each worker's correct classification(s) of work actually performed; hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in 40 U.S.C. 3141(2)(B) of the Davis-Bacon Act); daily and weekly number of hours actually worked in total and on each covered contract; deductions made; and actual wages paid.

(3) *Additional records relating to fringe benefits.* Whenever the Secretary of Labor has found under paragraph 1.e. of this section that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in 40 U.S.C. 3141(2)(B) of the Davis-Bacon Act, the contractor must maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits.

(4) *Additional records relating to apprenticeship.* Contractors with apprentices working under approved programs must maintain written evidence of the registration of apprenticeship programs, the registration of the apprentices, and the ratios and wage rates prescribed in the applicable programs.

b. *Certified payroll requirements* (1) *Frequency and method of submission.* The contractor or subcontractor must submit weekly, for each week in which any DBA- or Related Acts-covered work is performed, certified payrolls to the contracting agency. The prime contractor is responsible for the submission of all certified payrolls by all subcontractors. A contracting agency or prime contractor may permit or require contractors to submit certified payrolls through an electronic system, as long as the electronic system requires a legally valid electronic signature; the system allows the contractor, the contracting agency, and the Department of Labor to access the certified payrolls upon request for at least 3 years after the work on the prime contract has been completed; and the contracting agency or prime contractor permits other methods of submission in situations where the contractor is unable or limited in its ability to use or access the electronic system.

(2) *Information required.* The certified payrolls submitted must set out accurately and completely all of the information required to be maintained under paragraph 3.a.(2) of this section, except that full Social Security numbers and last known addresses, telephone numbers, and email addresses must not be included on weekly transmittals. Instead, the certified payrolls need only include an individually identifying number for each worker (*e.g.,* the last four digits of the worker's Social Security number). The required weekly certified payroll information may be submitted using Optional Form WH–347 or in any other format desired. Optional Form WH–347 is available for this purpose from the Wage and Hour Division website at *https://www.dol.gov/sites/dolgov/files/WHD/legacy/files/wh347/.pdf* or its successor website. It is not a violation of this section for a prime contractor to require a subcontractor to provide full Social Security numbers and last known addresses, telephone numbers, and email addresses to the prime contractor for its own records, without weekly submission by the subcontractor to the contracting agency.

(3) *Statement of Compliance.* Each certified payroll submitted must be accompanied by a “Statement of Compliance,” signed by the contractor or subcontractor, or the contractor's or subcontractor's agent who pays or supervises the payment of the persons working on the contract, and must certify the following:

(i) That the certified payroll for the payroll period contains the information required to be provided under paragraph 3.b. of this section, the appropriate information and basic records are being maintained under paragraph 3.a. of this section, and such information and records are correct and complete;

(ii) That each laborer or mechanic (including each helper and apprentice) working on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in 29 CFR part 3; and

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification(s) of work actually performed, as specified in the applicable wage determination incorporated into the contract.

(4) *Use of Optional Form WH–347.* The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH–347 will satisfy the requirement for submission of the “Statement of Compliance” required by paragraph 3.b.(3) of this section.

(5) *Signature.* The signature by the contractor, subcontractor, or the contractor's or subcontractor's agent must be an original handwritten signature or a legally valid electronic signature.

(6) *Falsification.* The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under 18 U.S.C. 1001 and 31 U.S.C. 3729.

(7) *Length of certified payroll retention.* The contractor or subcontractor must preserve all certified payrolls during the course of the work and for a period of 3 years after all the work on the prime contract is completed.

c. *Contracts, subcontracts, and related documents.* The contractor or subcontractor must maintain this contract or subcontract and related documents including, without limitation, bids, proposals, amendments, modifications, and extensions. The contractor or subcontractor must preserve these contracts, subcontracts, and related documents during the course of the work and for a period of 3 years after all the work on the prime contract is completed.

d. *Required disclosures and access* (1) *Required record disclosures and access to workers.* The contractor or subcontractor must make the records required under paragraphs 3.a. through 3.c. of this section, and any other documents that the contracting agency, the State DOT, the FHWA, or the Department of Labor deems necessary to determine compliance with the labor standards provisions of any of the applicable statutes referenced by § 5.1, available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and must permit such representatives to interview workers during working hours on the job.

(2) *Sanctions for non-compliance with records and worker access requirements.* If the contractor or subcontractor fails to submit the required records or to make them available, or refuses to permit worker interviews during working hours on the job, the Federal agency may, after written notice to the contractor, sponsor, applicant, owner, or other entity, as the case may be, that maintains such records or that employs such workers, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available, or to permit worker interviews during working hours on the job, may be grounds for debarment action pursuant to § 5.12. In addition, any contractor or other person that fails to submit the required records or make those records available to WHD within the time WHD requests that the records be produced will be precluded from introducing as evidence in an administrative proceeding under 29 CFR part 6 any of the required records that were not provided or made available to WHD. WHD will take into consideration a reasonable request from the contractor or person for an extension of the time for submission of records. WHD will determine the reasonableness of the request and may consider, among other things, the location of the records and the volume of production.

(3) *Required information disclosures.* Contractors and subcontractors must maintain the full Social Security number and last known address, telephone number, and email address of each covered worker, and must provide them upon request to the contracting agency, the State DOT, the FHWA, the contractor, or the Wage and Hour Division of the Department of Labor for purposes of an investigation or other compliance action.

4. Apprentices and equal employment opportunity (29 CFR 5.5)

a. *Apprentices* (1) *Rate of pay.* Apprentices will be permitted to work at less than the predetermined rate for the work they perform when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship (OA), or with a State Apprenticeship Agency recognized by the OA. A person who is not individually registered in the program, but who has been certified by the OA or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice, will be permitted to work at less than the predetermined rate for the work they perform in the first 90 days of probationary employment as an apprentice in such a program. In the event the OA or a State Apprenticeship Agency recognized by the OA withdraws approval of an apprenticeship program, the contractor will no longer be permitted to use apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

(2) *Fringe benefits.* Apprentices must be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringe benefits must be paid in accordance with that determination.

(3) *Apprenticeship ratio.* The allowable ratio of apprentices to journeyworkers on the job site in any craft classification must not be greater than the ratio permitted to the contractor as to the entire work force under the registered program or the ratio applicable to the locality of the project pursuant to paragraph 4.a.(4) of this section. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated in paragraph 4.a.(1) of this section, must be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under this section must be paid not less than the applicable wage rate on the wage determination for the work actually performed.

(4) *Reciprocity of ratios and wage rates.* Where a contractor is performing construction on a project in a locality other than the locality in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyworker's hourly rate) applicable within the locality in which the construction is being performed must be observed. If there is no applicable ratio or wage rate for the locality of the project, the ratio and wage rate specified in the contractor's registered program must be observed.

b. *Equal employment opportunity.* The use of apprentices and journeyworkers under this part must be in conformity with

the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.

c. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. 23 CFR 230.111(e)(2). The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeyworkers shall not be greater than permitted by the terms of the particular program.

5. Compliance with Copeland Act requirements. The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract as provided in 29 CFR 5.5.

6. Subcontracts. The contractor or subcontractor must insert FHWA-1273 in any subcontracts, along with the applicable wage determination(s) and such other clauses or contract modifications as the contracting agency may by appropriate instructions require, and a clause requiring the subcontractors to include these clauses and wage determination(s) in any lower tier subcontracts. The prime contractor is responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in this section. In the event of any violations of these clauses, the prime contractor and any subcontractor(s) responsible will be liable for any unpaid wages and monetary relief, including interest from the date of the underpayment or loss, due to any workers of lower-tier subcontractors, and may be subject to debarment, as appropriate. 29 CFR 5.5.

7. Contract termination: debarment. A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. Compliance with Davis-Bacon and Related Act requirements. All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract as provided in 29 CFR 5.5.

9. Disputes concerning labor standards. As provided in 29 CFR 5.5, disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. Certification of eligibility. a. By entering into this contract, the contractor certifies that neither it nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of 40 U.S.C. 3144(b) or § 5.12(a).

b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of 40 U.S.C. 3144(b) or § 5.12(a).

c. The penalty for making false statements is prescribed in the U.S. Code, Title 18 Crimes and Criminal Procedure, 18 U.S.C. 1001.

11. Anti-retaliation. It is unlawful for any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, or to cause any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, any worker or job applicant for:

a. Notifying any contractor of any conduct which the worker reasonably believes constitutes a violation of the DBA, Related Acts, this part, or 29 CFR part 1 or 3;

b. Filing any complaint, initiating or causing to be initiated any proceeding, or otherwise asserting or seeking to assert on behalf of themselves or others any right or protection under the DBA, Related Acts, this part, or 29 CFR part 1 or 3;

c. Cooperating in any investigation or other compliance action, or testifying in any proceeding under the DBA, Related Acts, this part, or 29 CFR part 1 or 3; or

d. Informing any other person about their rights under the DBA, Related Acts, this part, or 29 CFR part 1 or 3.

V. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

Pursuant to 29 CFR 5.5(b), the following clauses apply to any Federal-aid construction contract in an amount in excess of $100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchpersons and guards.

1. Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek. 29 CFR 5.5.

2. Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph 1. of this section the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages and interest from the date of the underpayment. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or

mechanic, including watchpersons and guards, employed in violation of the clause set forth in paragraph 1. of this section, in the sum currently provided in 29 CFR 5.5(b)(2)* for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph 1. of this section.

* $31 as of January 15, 2023 (See 88 FR 88 FR 2210) as may be adjusted annually by the Department of Labor, pursuant to the Federal Civil Penalties Inflation Adjustment Act of 1990.

3. Withholding for unpaid wages and liquidated damages

a. *Withholding process.* The FHWA or the contracting agency may, upon its own action, or must, upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor so much of the accrued payments or advances as may be considered necessary to satisfy the liabilities of the prime contractor or any subcontractor for any unpaid wages; monetary relief, including interest; and liquidated damages required by the clauses set forth in this section on this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract subject to the Contract Work Hours and Safety Standards Act that is held by the same prime contractor (as defined in § 5.2). The necessary funds may be withheld from the contractor under this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract that is subject to the Contract Work Hours and Safety Standards Act and is held by the same prime contractor, regardless of whether the other contract was awarded or assisted by the same agency, and such funds may be used to satisfy the contractor liability for which the funds were withheld.

b. *Priority to withheld funds.* The Department has priority to funds withheld or to be withheld in accordance with Section IV paragraph 2.a. or paragraph 3.a. of this section, or both, over claims to those funds by:

(1) A contractor's surety(ies), including without limitation performance bond sureties and payment bond sureties;

(2) A contracting agency for its reprocurement costs;

(3) A trustee(s) (either a court-appointed trustee or a U.S. trustee, or both) in bankruptcy of a contractor, or a contractor's bankruptcy estate;

(4) A contractor's assignee(s);

(5) A contractor's successor(s); or

(6) A claim asserted under the Prompt Payment Act, 31 U.S.C. 3901–3907.

4. Subcontracts. The contractor or subcontractor must insert in any subcontracts the clauses set forth in paragraphs 1. through 5. of this section and a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor is responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs 1. through 5. In the event of any violations of these clauses, the prime contractor and any subcontractor(s) responsible will be liable for any unpaid wages and monetary relief, including interest from the date of the underpayment or loss, due to any workers of lower-tier subcontractors, and associated liquidated damages and may be subject to debarment, as appropriate.

5. Anti-retaliation. It is unlawful for any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, or to cause any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, any worker or job applicant for:

a. Notifying any contractor of any conduct which the worker reasonably believes constitutes a violation of the Contract Work Hours and Safety Standards Act (CWHSSA) or its implementing regulations in this part;

b. Filing any complaint, initiating or causing to be initiated any proceeding, or otherwise asserting or seeking to assert on behalf of themselves or others any right or protection under CWHSSA or this part;

c. Cooperating in any investigation or other compliance action, or testifying in any proceeding under CWHSSA or this part; or

d. Informing any other person about their rights under CWHSSA or this part.

VI. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System pursuant to 23 CFR 635.116.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).

a. The term “perform work with its own organization” in paragraph 1 of Section VI refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions: (based on longstanding interpretation)

(1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;
(2) the prime contractor remains responsible for the quality of the work of the leased employees;

(3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and

(4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.

b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract. 23 CFR 635.102.

2. Pursuant to 23 CFR 635.116(a), the contract amount upon which the requirements set forth in paragraph (1) of Section VI is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. Pursuant to 23 CFR 635.116(c), the contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract. (based on long-standing interpretation of 23 CFR 635.116).

5. The 30-percent self-performance requirement of paragraph (1) is not applicable to design-build contracts; however, contracting agencies may establish their own self-performance requirements. 23 CFR 635.116(d).

VII. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR Part 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract. 23 CFR 635.108.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR Part 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704). 29 CFR 1926.10.

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).

VIII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR Part 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 11, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

IX. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT (42 U.S.C. 7606; 2 CFR 200.88; EO 11738)

This provision is applicable to all Federal-aid construction contracts in excess of $150,000 and to all related subcontracts. 48 CFR 2.101; 2 CFR 200.327.

By submission of this bid/proposal or the execution of this contract or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, subcontractor, supplier, or vendor agrees to comply with all applicable standards, orders or regulations issued pursuant to the Clean Air Act (42 U.S.C. 7401-7671q) and the Federal Water Pollution Control Act, as amended (33 U.S.C. 1251-1387). Violations must be reported to the Federal Highway Administration and the Regional Office of the Environmental Protection Agency. 2 CFR Part 200, Appendix II.

The contractor agrees to include or cause to be included the requirements of this Section in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements. 2 CFR 200.327.

X. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost $25,000 or more – as defined in 2 CFR Parts 180 and 1200. 2 CFR 180.220 and 1200.220.

1**. Instructions for Certification – First Tier Participants:**

a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction. 2 CFR 180.320.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default. 2 CFR 180.325.

d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances. 2 CFR 180.345 and 180.350.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180, Subpart I, 180.900-180.1020, and 1200. “First Tier Covered Transactions” refers to any covered transaction between a recipient or subrecipient of Federal funds and a participant (such as the prime or general contract). “Lower Tier Covered Transactions” refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). “First Tier Participant” refers to the participant who has entered into a covered transaction with a recipient or subrecipient of Federal funds (such as the prime or general contractor). “Lower Tier Participant” refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction. 2 CFR 180.330.

g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the $25,000 threshold. 2 CFR 180.220 and 180.300.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. 2 CFR 180.300; 180.320, and 180.325. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. 2 CFR 180.335. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the System for Award Management website (https://www.sam.gov/). 2 CFR 180.300, 180.320, and 180.325.

i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default. 2 CFR 180.325.

* * * * *

2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency, 2 CFR 180.335;.

(2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State, or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property, 2 CFR 180.800;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification, 2 CFR 180.700 and 180.800; and

(4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default. 2 CFR 180.335(d).

(5) Are not a corporation that has been convicted of a felony violation under any Federal law within the two-year period preceding this proposal (USDOT Order 4200.6 implementing appropriations act requirements); and

(6) Are not a corporation with any unpaid Federal tax liability that has been assessed, for which all judicial and administrative remedies have been exhausted, or have lapsed, and that is not being paid in a timely manner pursuant to an agreement with the authority responsible for collecting the tax liability (USDOT Order 4200.6 implementing appropriations act requirements).

b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant should attach an explanation to this proposal. 2 CFR 180.335 and 180.340.

* * * * *

3. **Instructions for Certification - Lower Tier Participants:**

(Applicable to all subcontracts, purchase orders, and other lower tier transactions requiring prior FHWA approval or estimated to cost $25,000 or more - 2 CFR Parts 180 and 1200). 2 CFR 180.220 and 1200.220.

a. By signing and submitting this proposal, the prospective lower tier participant is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances. 2 CFR 180.365.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180, Subpart I, 180.900 – 180.1020, and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. “First Tier Covered Transactions” refers to any covered transaction between a recipient or subrecipient of Federal funds and a participant (such as the prime or general contract). “Lower Tier Covered Transactions” refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). “First Tier Participant” refers to the participant who has entered into a covered transaction with a recipient or subrecipient of Federal funds (such as the prime or general contractor). “Lower Tier Participant” refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated. 2 CFR 1200.220 and 1200.332.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the $25,000 threshold. 2 CFR 180.220 and 1200.220.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the System for Award Management website (https://www.sam.gov/), which is compiled by the General Services Administration. 2 CFR 180.300, 180.320, 180.330, and 180.335.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily

excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment. 2 CFR 180.325.

* * * * *

4. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

a. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals:

(1) is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency, 2 CFR 180.355;

(2) is a corporation that has been convicted of a felony violation under any Federal law within the two-year period preceding this proposal (USDOT Order 4200.6 implementing appropriations act requirements); and

(3) is a corporation with any unpaid Federal tax liability that has been assessed, for which all judicial and administrative remedies have been exhausted, or have lapsed, and that is not being paid in a timely manner pursuant to an agreement with the authority responsible for collecting the tax liability. (USDOT Order 4200.6 implementing appropriations act requirements)

b. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant should attach an explanation to this proposal.

* * * * *

XI. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed $100,000. 49 CFR Part 20, App. A.

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than $10,000 and not more than $100,000 for each such failure.

3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed $100,000 and that all such recipients shall certify and disclose accordingly.

XII. USE OF UNITED STATES-FLAG VESSELS:

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, or any other covered transaction. 46 CFR Part 381.

This requirement applies to material or equipment that is acquired for a specific Federal-aid highway project. 46 CFR 381.7. It is not applicable to goods or materials that come into inventories independent of an FHWA funded-contract.

When oceanic shipments (or shipments across the Great Lakes) are necessary for materials or equipment acquired for a specific Federal-aid construction project, the bidder, proposer, contractor, subcontractor, or vendor agrees:

1. To utilize privately owned United States-flag commercial vessels to ship at least 50 percent of the gross tonnage (computed separately for dry bulk carriers, dry cargo liners, and tankers) involved, whenever shipping any equipment, material, or commodities pursuant to this contract, to the extent such vessels are available at fair and reasonable rates for United States-flag commercial vessels. 46 CFR 381.7.

2. To furnish within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, ‘on-board’ commercial ocean bill-of-lading in English for each shipment of cargo described in paragraph (b)(1) of this section to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Office of Cargo and Commercial Sealift (MAR-620), Maritime Administration, Washington, DC 20590. (MARAD requires copies of the ocean carrier's (master) bills of lading, certified onboard, dated, with rates and charges. These bills of lading may contain business sensitive information and therefore may be submitted directly to MARAD by the Ocean Transportation Intermediary on behalf of the contractor). 46 CFR 381.7.

ATTACHMENT A - EMPLOYMENT AND MATERIALS PREFERENCE FOR APPALACHIAN DEVELOPMENT HIGHWAY SYSTEM OR APPALACHIAN LOCAL ACCESS ROAD CONTRACTS (23 CFR 633, Subpart B, Appendix B)
This provision is applicable to all Federal-aid projects funded under the Appalachian Regional Development Act of 1965.

1. During the performance of this contract, the contractor undertaking to do work which is, or reasonably may be, done as on-site work, shall give preference to qualified persons who regularly reside in the labor area as designated by the DOL wherein the contract work is situated, or the subregion, or the Appalachian counties of the State wherein the contract work is situated, except:

a. To the extent that qualified persons regularly residing in the area are not available.

b. For the reasonable needs of the contractor to employ supervisory or specially experienced personnel necessary to assure an efficient execution of the contract work.

c. For the obligation of the contractor to offer employment to present or former employees as the result of a lawful collective bargaining contract, provided that the number of nonresident persons employed under this subparagraph (1c) shall not exceed 20 percent of the total number of employees employed by the contractor on the contract work, except as provided in subparagraph (4) below.

2. The contractor shall place a job order with the State Employment Service indicating (a) the classifications of the laborers, mechanics and other employees required to perform the contract work, (b) the number of employees required in each classification, (c) the date on which the participant estimates such employees will be required, and (d) any other pertinent information required by the State Employment Service to complete the job order form. The job order may be placed with the State Employment Service in writing or by telephone. If during the course of the contract work, the information submitted by the contractor in the original job order is substantially modified, the participant shall promptly notify the State Employment Service.

3. The contractor shall give full consideration to all qualified job applicants referred to him by the State Employment Service. The contractor is not required to grant employment to any job applicants who, in his opinion, are not qualified to perform the classification of work required.

4. If, within one week following the placing of a job order by the contractor with the State Employment Service, the State Employment Service is unable to refer any qualified job applicants to the contractor, or less than the number requested, the State Employment Service will forward a certificate to the contractor indicating the unavailability of applicants. Such certificate shall be made a part of the contractor's permanent project records. Upon receipt of this certificate, the contractor may employ persons who do not normally reside in the labor area to fill positions covered by the certificate, notwithstanding the provisions of subparagraph (1c) above.

5. The provisions of 23 CFR 633.207(e) allow the contracting agency to provide a contractual preference for the use of mineral resource materials native to the Appalachian region.

6. The contractor shall include the provisions of Sections 1 through 4 of this Attachment A in every subcontract for work which is, or reasonably may be, done as on-site work.

Supplemental Revisions for FHWA Form-1273 (Dated May 1, 2012)
Required Contract Provisions
Federal-Aid Construction Contracts

The following are supplementary or amendatory to the May 1, 2012, FHWA Form-1273 insofar as they apply to this contract:

Add the following provisions in accordance with the FHWA memo dated December 11, 2015:

Utilize privately owned United States-flag commercial vessels to ship at least 50 percent of the gross tonnage (computed separately for dry bulk carriers, dry cargo liners, and tankers) involved, whenever shipping any equipment, material, or commodities pursuant to this contract, to the extent such vessels are available at fair and reasonable rates for United States-flag commercial vessels.

Furnish within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, ‘on-board’ commercial ocean bill-of-lading in English for each shipment of cargo described in above paragraph to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Division of National Cargo, Office of Market Development, Maritime Administration, Washington, DC 20590.

SPECIAL PROVISIONS

EEO AFFIRMATIVE ACTION REQUIREMENTS ON FEDERAL & FEDERAL-AID CONSTRUCTION CONTRACTS

Federal-aid contractors are hereby notified they are subject to the OFCCP goals and economic areas for minority and female participation expressed below. Compliance with the goals and OFCCP affirmative action efforts for contracts and subcontracts consisting of $10,000 or more will be determined by OFCCP officials.

Notice of Requirement for Affirmative Action to Ensure Equal Employment Opportunity (Executive Order 11246)

1. The Offeror's or Bidder's attention is called to the Equal Opportunity Clause and "Standard Federal Equal Employment Opportunity Construction Contract Specifications" set forth herein.
2. The goals and timetables for minority and female participation, expressed in percentage terms for the Contractor's aggregate workforce in each trade on all construction work in the covered area, are as follows:

GOALS FOR FEMALE PARTICIPATION (statewide) 6.9%

GOALS FOR MINORITY PARTICIPATION IN EACH TRADE
Economic Areas:

152
Non-SMSA (Standard Metropolitan Statistical Area) Counties 4.4%
Daniels, Richland, Roosevelt, Sheridan

153 Great Falls, MT
SMSA Counties
3040 Great Falls, MT 3.2%
Cascade

Non-SMSA Counties 4.1%
Blaine, Broadwater, Chouteau, Fergus, Glacier, Hill, Jefferson, Judith Basin, Lewis & Clark, Liberty, Meagher, Petroleum, Phillips, Pondera, Teton, Toole, Valley, Wheatland

154 Missoula, MT
Non-SMSA Counties 2.7%
Beaverhead, Deer Lodge, Flathead, Granite, Lake, Lincoln, Madison, Mineral, Missoula, Powell, Ravalli, Sanders, Silver Bow

155 Billings, MT
SMSA Counties
0880 Billings, MT 3.3%
Yellowstone

Non-SMSA Counties 3.3%
Big Horn, Carbon, Carter, Custer, Dawson, Fallon, Gallatin, Garfield, Golden Valley, McCone, Musselshell, Park, Powder River, Prairie, Rosebud, Stillwater, Sweet Grass, Treasure, Wibaux, Yellowstone Nat'l Park

These goals are applicable to all the Contractor's construction work (whether or not it is Federal or federally assisted) performed in the covered area. If the contractor performs construction work in a geographical area located outside of the covered area, it shall apply the goals established for such geographical area where the work is actually performed. With regard to this second area, the contractor also is subject to the goals for both its federally involved and non-federally involved construction.

The Contractor's compliance with the Executive Order and the regulations in 41 CFR Part 60-4 shall be based on its implementation of the Equal Opportunity Clause, specific affirmative action obligations required by the specifications set forth in 41 CFR 60-4.3(a), and its efforts to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade, and the contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project for the sole purpose of meeting the Contractor's goals shall be a violation of the contract, the Executive Order and the regulations in 41 CFR Part 60-4. Compliance with the goals will be measured against the total work hours performed.

3. The contractor shall provide written notification to the Director of the Office of Federal Contract Compliance Programs within 10 working days of award of any construction subcontract in excess of $10,000 at any tier for construction work under the contract resulting from this solicitation. The notification shall list the name, address and telephone number of the subcontractor; employer identification number of the subcontractor; estimated dollar amount of the subcontract; estimated starting and completion dates of the subcontract; and the geographical area in which the subcontract is to be performed.