
AWARD COPY

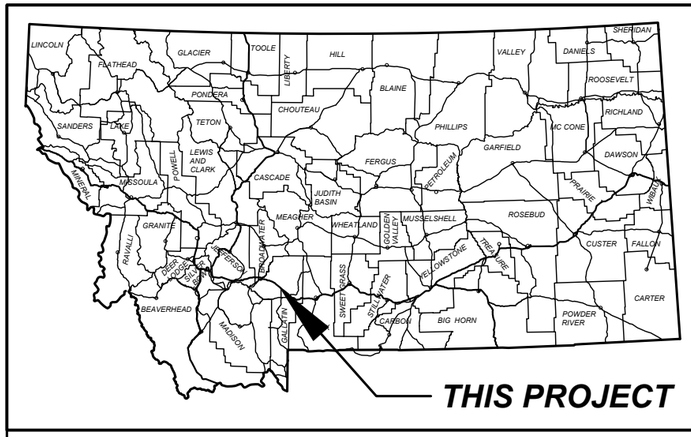

MONTANA DEPARTMENT OF TRANSPORTATION


FEDERAL AID PROJECT NH-CR 0602(103)

TRAFFIC SIGNALS, LIGHTING & ADA UPGRADES

JACKRABBIT - AMSTERDAM RD INT

GALLATIN COUNTY

LENGTH N/A MILES

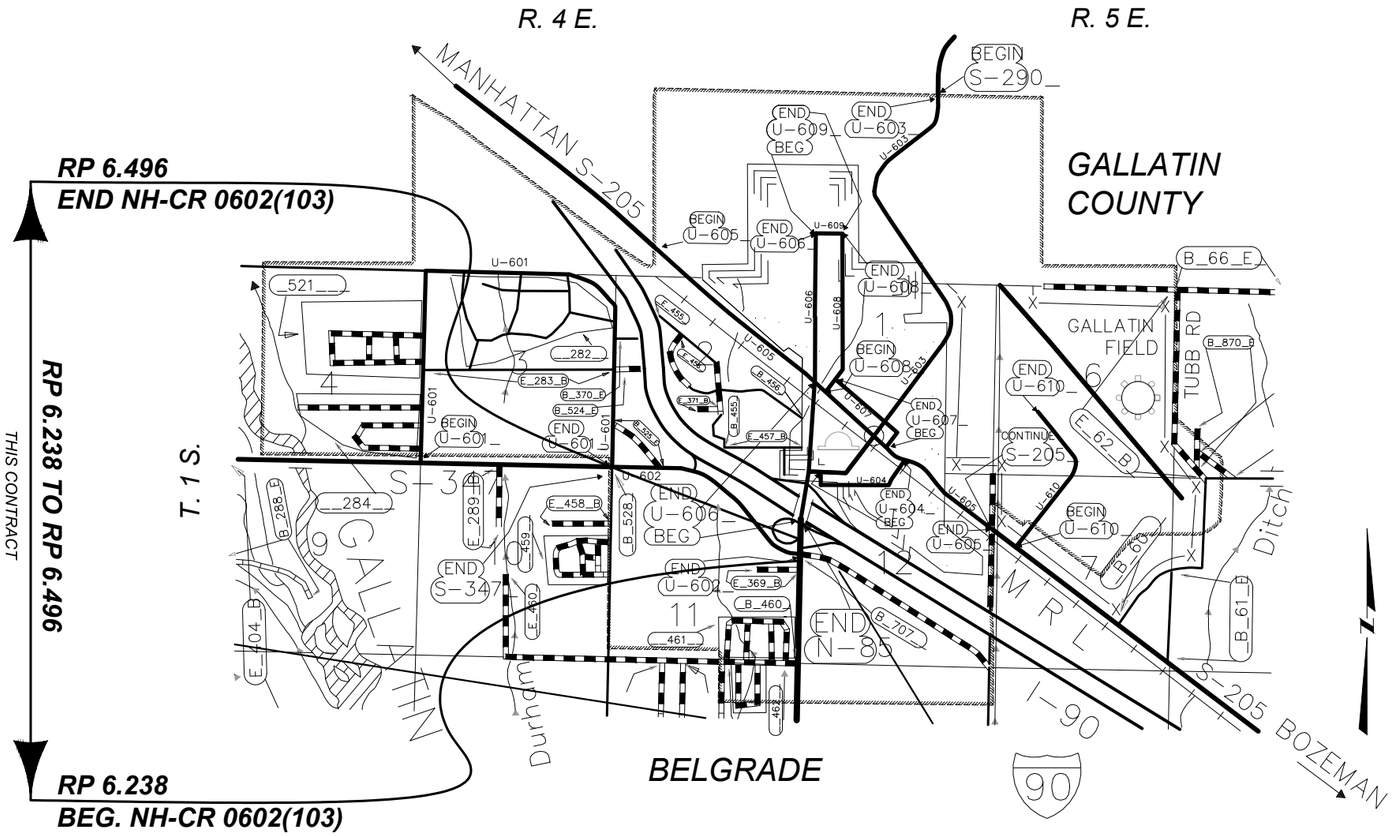

SHEET NO.
E1

PROJECT NAME JACKRABBIT-AMSTERDAM RD INT
COUNTY GALLATIN COUNTY
PROJECT ID NH-CR 0602(103)
UPN 9930001

DESIGNED BY
REVIEWED BY
CHECKED BY

MONTANA
Department of Transportation

EROSION CONTROL PLANS

3/3/2025 4:45 PM
9930001RDERTZ01.DWG

EROSION AND SEDIMENT CONTROL BMP'S

REFER TO THE MOST CURRENT RELEASE OF MDT'S EROSION & SEDIMENT CONTROL BMP MANUAL

PEV (SS-1) SHOULD BE IDENTIFIED AND USED THROUGHOUT THE ENTIRE PROJECT IN ALL AREAS NOT DISTURBED BY CONSTRUCTION

TS (SS-3) AND ES (SS-4) SHOULD BE UTILIZED THROUGHOUT THE ENTIRE PROJECT

GENERAL BMP'S

- I/O — INLET/OUTLET PROTECTION
- WP — WATERWAY PROTECTION
- WR — WATER RESOURCE PROTECTION

TEMPORARY SOIL STABILIZATION BMP'S (SS)

- PEV — PRESERVATION OF EXISTING VEGETATION (SS-1)
- MC — MULCH COVER (SS-2)
- TS — TEMPORARY SEEDING (SS-3)
- ES — EROSION SEEDING (SS-4)
- SB — SOIL BINDERS (SS-5)
- REC — ROLLED EROSION CONTROL PRODUCTS (SS-6)
- SR — SURFACE ROUGHENING (SS-7)
- WE — WIND EROSION CONTROL (SS-8)

RUN-ON AND RUNOFF CONTROL (RC)

- ED/LD — EARTH DIKES/DRAINAGE SWALES/LINED DITCHES (RC-1)
- OVDD — OUTLET VELOCITY DISSIPATION DEVICES (RC-2)
- TSD — TEMPORARY SLOPE DRAINS (RC-3)

TEMPORARY SEDIMENT CONTROL BMP'S (SC)

- SF — SILT FENCE (SC-1)
- DB — DESILTING BASIN (SC-2)
- ST — SEDIMENT TRAP (SC-3)
- CD — CHECK DAMS (SC-4)
- DDB — DUGOUT DITCH BASIN (SC-5)
- FR — FIBER ROLLS (SC-6)
- CS — COMPOST SOCKS (SC-7)
- BB — BRUSH BARRIER (SC-8)
- SAND-B — SANDBAG BARRIER (SC-9)
- GBB — GRAVEL BAG BERM (SC-10)
- RB — ROCK FILTER BERM (SC-11)
- I/O — INLET/OUTLET PROTECTION (SC-12)

TRACKING CONTROL BMP'S (TC)

- SCEE — STABILIZED CONSTRUCTION ENTRANCE/EXIT (SC-13)
- SCR — STABILIZED CONSTRUCTION ROADWAY (SC-14)
- EOTW — ENTRANCE/OUTLET TIRE WASH (SC-15)

THE FOLLOWING BMP ALTERNATIVES ARE NOT COMPREHENSIVE AND DO NOT SUPERSEDE MDT CONTRACT REQUIREMENTS OR MANDATES AND REQUIREMENTS SPECIFIED BY OTHER AUTHORIZED LOCAL, STATE, AND FEDERAL AGENCIES.

I/O — INLET/OUTLET PROTECTION

REC, FR, ED/LD, CS, RB, GBB, SAND-B, OVDD

WR — WATER RESOURCE PROTECTION

FR, SF, REC, PEV, GBB, ES, TS, SAND-B, OVDD, I/O, TSD, RB

DT — DITCH TREATMENT

TS, CD, OVDD, REC, SAND-B, ED/LD, GBB, DDB, TSD, CS

SHEET NO. E2

PROJECT NAME JACKRABBIT-AMSTERDAM RD INT
COUNTY GALLATIN COUNTY
PROJECT ID NH-CR 0602(103)
UPN 9930001


DESIGNED BY
REVIEWED BY
CHECKED BY

MONTANA Department of Transportation

EROSION CONTROL PLANS

9930001RDERTZ02.DWG
1/22/2025 3:27 PM

AWARD COPY

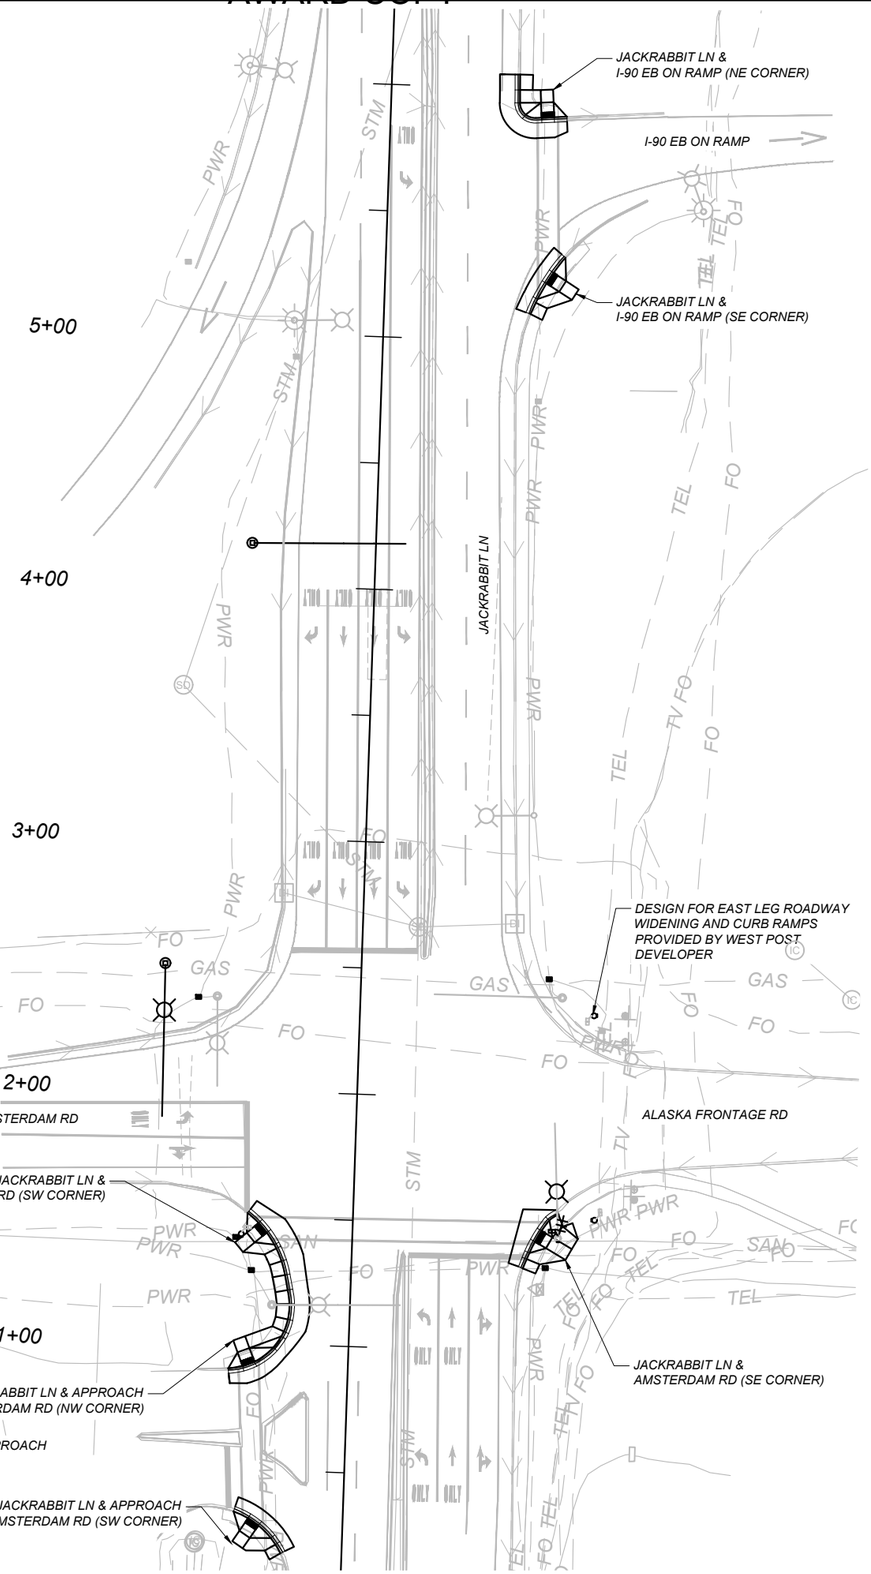

SHEET NO.
E3

PROJECT NAME **JACKRABBIT-AMSTERDAM RD INT**
COUNTY **GALLATIN COUNTY**
PROJECT ID **NH-CR 0602(103)**
UPN **9930001**

DESIGNED BY
REVIEWED BY
CHECKED BY

MONTANA
Department of Transportation

EROSION CONTROL PLANS

2/4/2025 2:29 PM
9930001RDEROZ01.DWG